WAAS CH 86620 W36A	APP CRS 358°	Rwy Idg 5998 TDZE 202 Apt Elev 206

RNAV (GPS) RWY 36

PINE BLUFF RGNL AIRPORT GRIDER FIELD (PBF)

Baro-VNAV NA when using Stuttgart altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA.
When local altimeter not received, use Stuttgart altimeter setting and increase all DA 75 feet and all MDA 80 feet; increase LNAV/VNAV visibility all Cats ⅛ mile and LNAV visibility Cats C and D ¼ mile.

MISSED APPROACH: Climb to 2000 direct PAYIT and hold.

ASOS	LITTLE ROCK APP CON	CLNC DEL	UNICOM
120.775	119.85 353.6	119.85	123.0 (CTAF) L

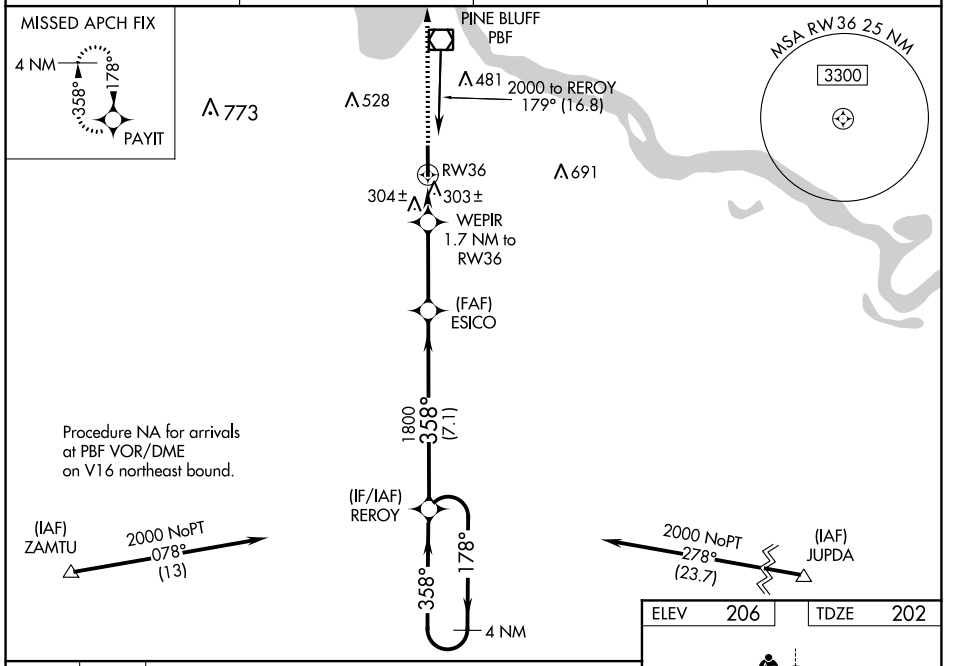

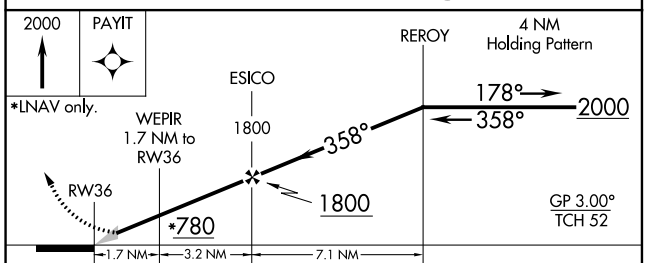

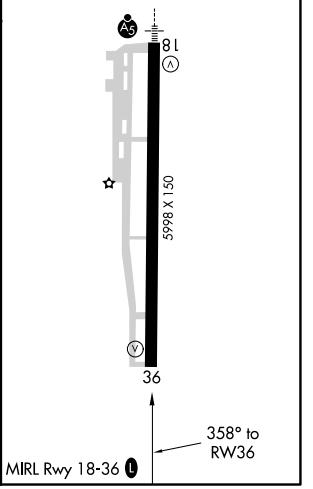

CATEGORY	A	B	C	D
LPV DA	459-1 250 (300-1)			
LNAV/VNAV DA	487-1 285 (300-1)			
LNAV MDA	600-1 398 (400-1)		600-1⅛ 398 (400-1⅛)	
CIRCLING	660-1 454 (500-1)	680-1 474 (500-1)	680-1½ 474 (500-1½)	760-2 554 (600-2)

SC-1, 03 DEC 2020 to 31 DEC 2020
SC-1, 03 DEC 2020 to 31 DEC 2020