

| | | |
|--|------------------------|---|
| WAAS CH 97517 W35A | APP CRS 355° | Rwy Idg 7198 TDZE 1776 Apt Elev 1791 |
|--|------------------------|---|

RNAV (GPS) RWY 35R
ABILENE RGNL (ABI)



RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 45°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats to RVR 6000, and LNAV Cats C/D/E to 1 $\frac{3}{8}$ SM.
A ** RVR 1800 authorized with use of FD or AP or HUD to DA.
 ASR

MALSR

MISSED APPROACH: Climb to 4000 direct GOFDO and hold, continue climb-in-hold to 4000.

| | | | |
|-------------------------------|--|---|---------------------------------------|
| <p>ATIS 118.25</p> | <p>ABILENE APP CON 125.0 338.3 (EAST) 127.2 282.3 (WEST)</p> | <p>ABILENE TOWER 120.1 257.8</p> | <p>GND CON 121.7 348.6</p> |
|-------------------------------|--|---|---------------------------------------|

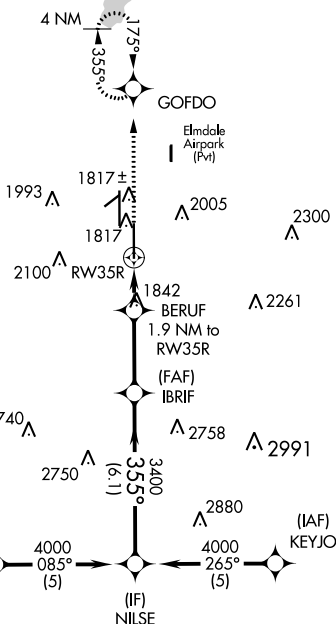

| | | |
|-----------|----------|-----------|
| ELEV 1791 | D | TDZE 1776 |
|-----------|----------|-----------|

