



WAAS CH <b>57919</b> <b>W13A</b>	APP CRS <b>129°</b>	Rwy Idg TDZE <b>3603</b> Apt Elev <b>3607</b>
--	------------------------	---

RNAV (GPS) Y RWY 13  
RICK HUSBAND AMARILLO INTL (AMA)

RNP APCH.			MISSED APPROACH: Climb to 5400 direct PAMPE and on track 105° to CAUDE and hold.		
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. ASR					
ATIS <b>118.85 350.3</b>	AMARILLO APP CON★ <b>119.5 307.0</b>	AMARILLO TOWER★ <b>118.3(CTAF) 257.9</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>121.65 239.275</b>	UNICOM <b>122.95</b>

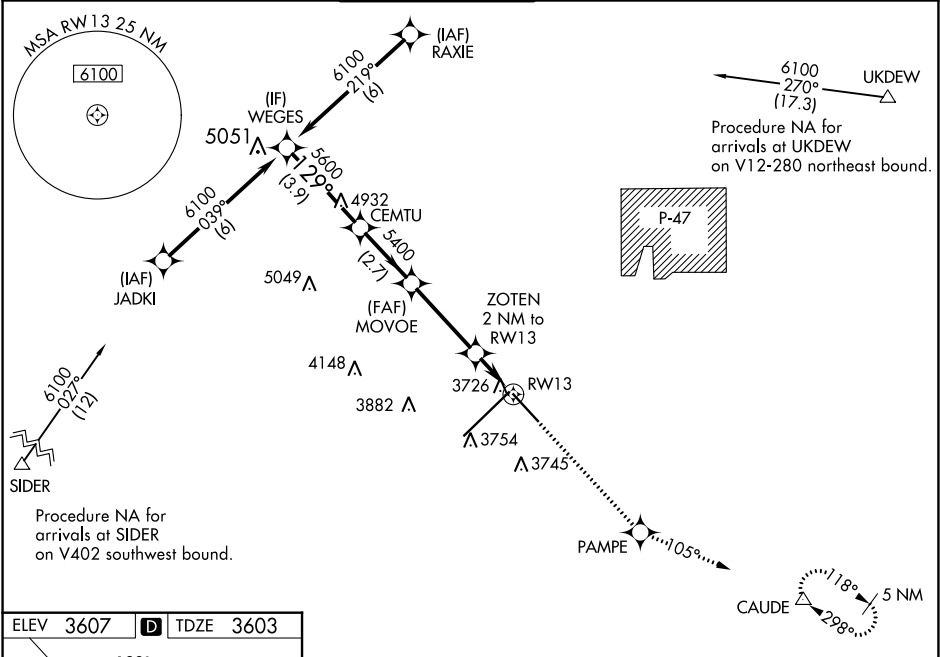

ELEV <b>3607</b>	<b>D</b>	TDZE <b>3603</b>
------------------	----------	------------------

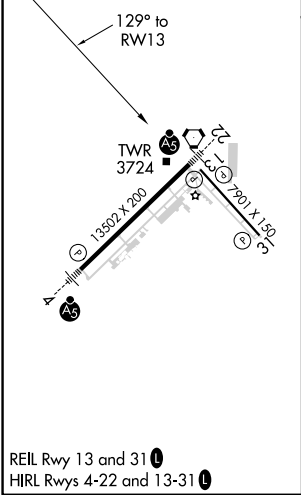

WEGES		5400 ↑		PAMPE ✧		tr 105°		CAUDE △	
6100 Procedure Turn NA GP 3.00° TCH 52		CEMTU		MOVOE 5400		ZOTEN 2 NM to RW13		*LNAV only.	
129°		5600		5400		*4280		*1 NM to RW13	
3.9 NM		2.7 NM		3.4 NM		1 NM		1 NM	
CATEGORY		A		B		C		D	
LPV DA		3803-¾		200 (200-¾)					
LNAV/VNAV DA		3976-1¼		373 (400-1¼)					
LNAV MDA		3980-1		377 (400-1)				3980-1¼ 377 (400-1¼)	
CIRCLING		4080-1		473 (500-1)		4240-1¾ 633 (700-1¼)		4280-2¼ 673 (700-2¼)	