WAAS	APP CRS		
CH 53504	311°	Rwy Idg	9200
W31A		TDZE	354
		Apt Elev	365

RNAV (GPS) RWY 31

EAST TEXAS RGNL (GGG)

Baro-VNAV NA when using Gilmer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. VDP NA when using Gilmer altimeter setting. When local altimeter setting not received, use Gilmer altimeter setting and increase all DA 59 feet, all MDA 60 feet and all visibilities ¼ mile.

MISSED APPROACH: Climb to 2600 direct BOSME and hold.

ATIS	LONGVIEW APP CON ★	EASTEX TOWER ★	GND CON	UNICOM
119.65	128.75 379.15	119.2 (CTAF) L 377.05	121.6	122.95

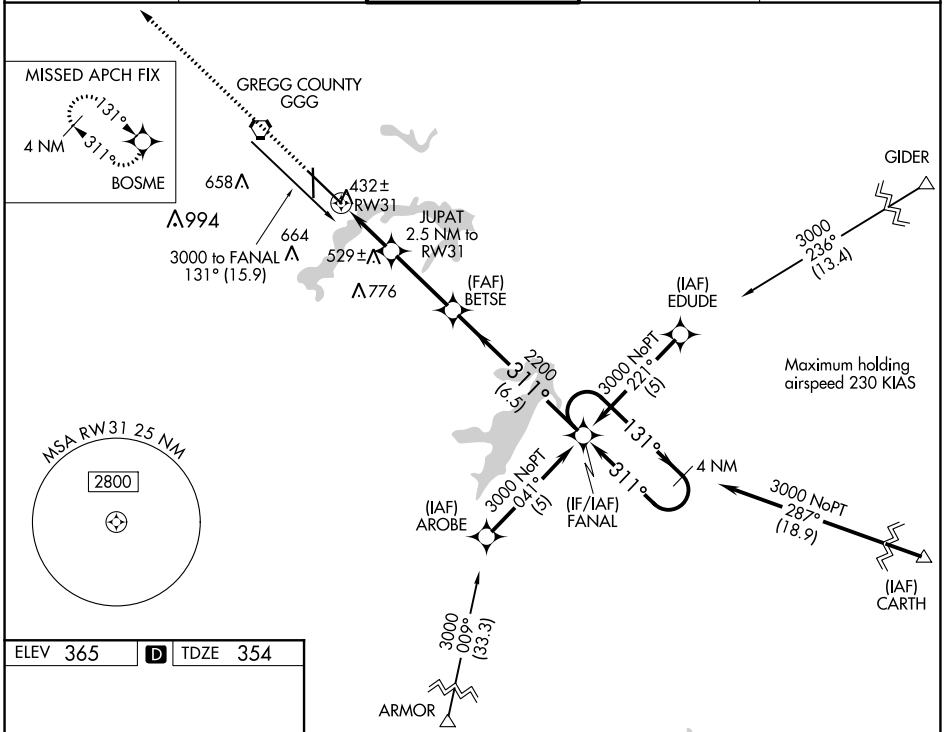

SC-2, 03 DEC 2020 to 31 DEC 2020

SC-2, 03 DEC 2020 to 31 DEC 2020

ELEV 365 D TDZE 354



HIRL Rwy 13-31 L
MIRL Rwy 18-36

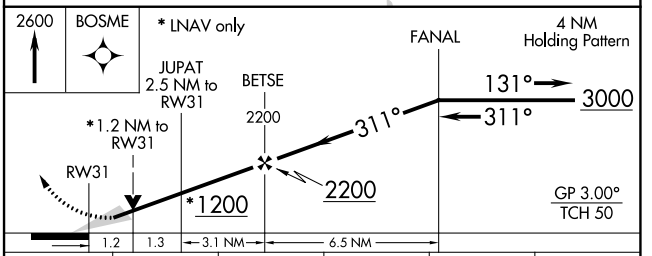

CATEGORY	A	B	C	D	E
LPV DA	604-¾ 250 (300-¾)				
LNAV/VNAV DA	682-1¼ 328 (400-1¼)				
LNAV MDA	800-1 446 (500-1)		800-1¼ 446 (500-1¼)	800-1½ 446 (500-1½)	
CIRCLING	860-1 495 (500-1)		860-1½ 495 (500-1½)	920-2 555 (600-2)	1080-2½ 715 (800-2½)