# RNAV (GPS) RWY 18

DENTON ENTERPRISE (DTO)

| WAAS CH 50520 W18A | APP CRS 177° | Rwy Idg 6502 / TDZE 640 / Apt Elev 642 |
|---|---|---|

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Worth Alliance altimeter setting and increase all DA 44 feet and all MDA 60 feet. Increase LNAV/VNAV visibility ⅛ mile all Cats, increase Circling Cat D visibility ¼ mile. For inop MALSR, increase visibility LNAV Cat C/D and LNAV/VNAV all Cats, ⅜ mile. Baro-VNAV and VDP NA when using Fort Worth Alliance altimeter setting.

MALSR

MISSED APPROACH: Climb to 1900 then climbing right turn to 4000 direct GREGS and hold.

| ASOS | REGIONAL APP CON | DENTON TOWER★ | GND CON | CLNC DEL | UNICOM |
|---|---|---|---|---|---|
| 119.325 | 118.1 306.95 | 119.95 (CTAF) L | 123.95 | 123.95 | 122.95 |

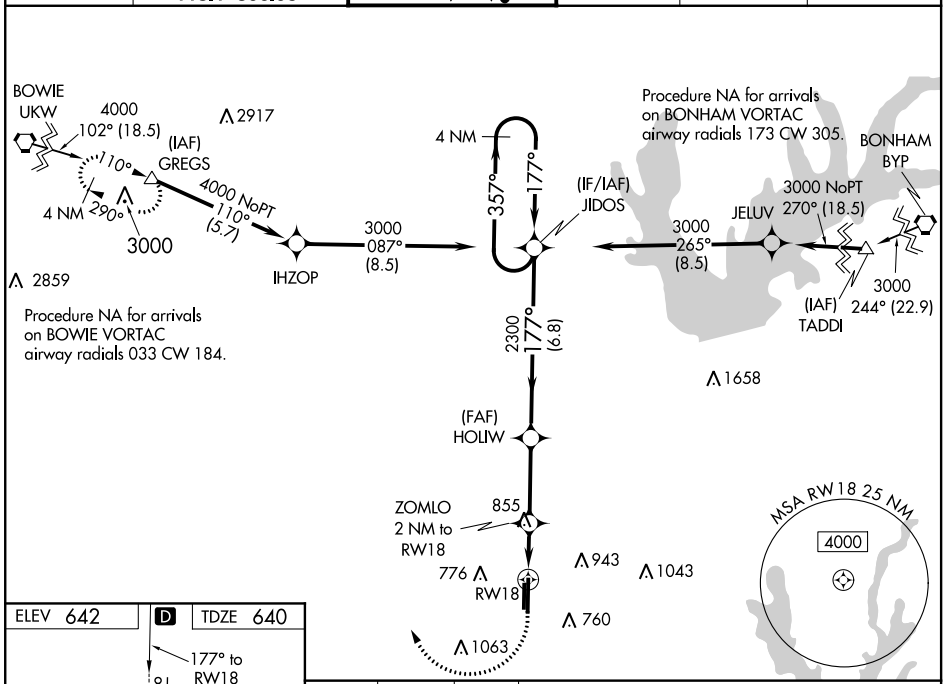


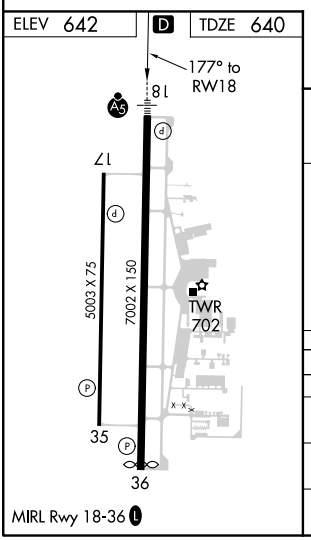


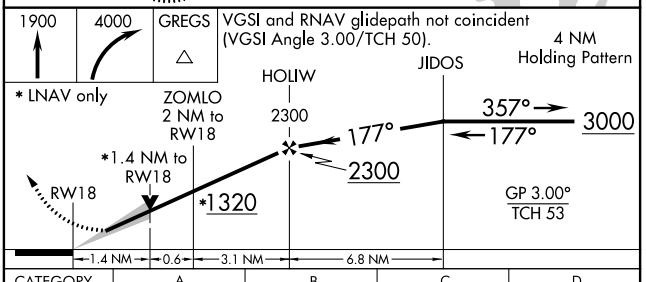


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 840-½ 200 (200-½) | | | |
| LNAV/VNAV DA | 1103-1⅛ 463 (500-1⅛) | | | |
| LNAV MDA | 1120-½ 480 (500-½) | | 1120-1 480 (500-1) | |
| CIRCLING | 1160-1 518 (600-1) | | 1160-1½ 518 (600-1½) | 1260-2 618 (700-2) |



SC-2, 03 DEC 2020 to 31 DEC 2020
SC-2, 03 DEC 2020 to 31 DEC 2020