



ATIS ★  
120.825  
CLNC DEL (When twr closed)  
121.35  
GND CON  
120.125  
SAN MARCOS TOWER ★  
126.825  
AUSTIN DEP CON  
119.0 370.85

TOP ALTITUDE:  
ASSIGNED BY ATC

NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: RNAV-1.

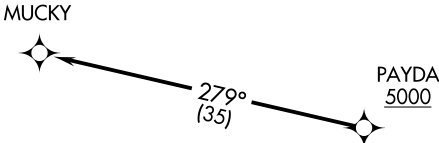

TAKEOFF MINIMUMS:  
Rwys 8, 13, 17, 26: Standard.  
Rwy 31: Standard with minimum climb of 210' per NM to 2600.  
Rwy 35: Standard with minimum climb of 230' per NM to 2600.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 8: Climb heading 081° or as assigned by ATC for RADAR vectors to PAYDA at of above 5000, thence....  
TAKEOFF RWY 13: Climb heading 126° or as assigned by ATC for RADAR vectors to PAYDA at of above 5000, thence....  
TAKEOFF RWY 17: Climb heading 171° or as assigned by ATC for RADAR vectors to PAYDA at of above 5000, thence....  
TAKEOFF RWY 26: Climb heading 261° or as assigned by ATC for RADAR vectors to PAYDA at of above 5000, thence....  
TAKEOFF RWY 31: Climb heading 306° or as assigned by ATC for RADAR vectors to PAYDA at of above 5000, thence....  
TAKEOFF RWY 35: Climb heading 351° or as assigned by ATC for RADAR vectors to PAYDA at of above 5000, thence....

...on track 279° to MUCKY. Maintain altitude assigned by ATC. Expect filed altitude 10 minutes after departure.