



TOP ALTITUDE:
ASSIGNED BY ATC

D-ATIS
124.4
CLNC DEL
125.5 263.0
CPDLC
GND CON
121.9 348.6
AUSTIN TOWER
121.0 281.5
AUSTIN DEP CON
119.0 370.85



NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV-1.

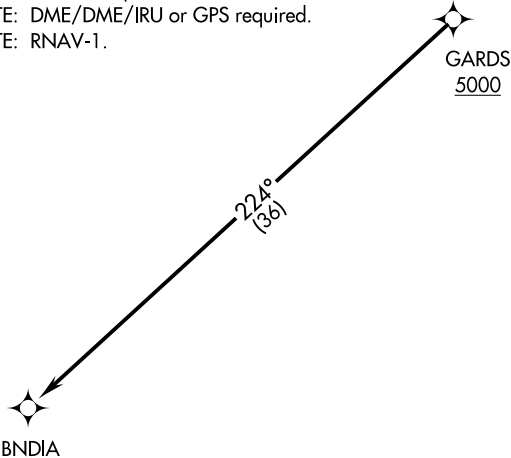

TAKEOFF MINIMUMS:
Rwys 17L/R: Standard.
Rwys 35L/R: Standard with minimum
climb of 240' per NM to 2600.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

RWYS 17L/R: Climb heading 175° or as assigned by ATC for RADAR vectors to cross GARDS at or above 5000, thence

RWYS 35L/R: Climb heading 355° or as assigned by ATC for RADAR vectors to cross GARDS at or above 5000, thence

. . . . on track 224° to BNDIA. Maintain altitude assigned by ATC. Expect filed altitude 10 minutes after departure.