

RNAV (GPS) RWY 35

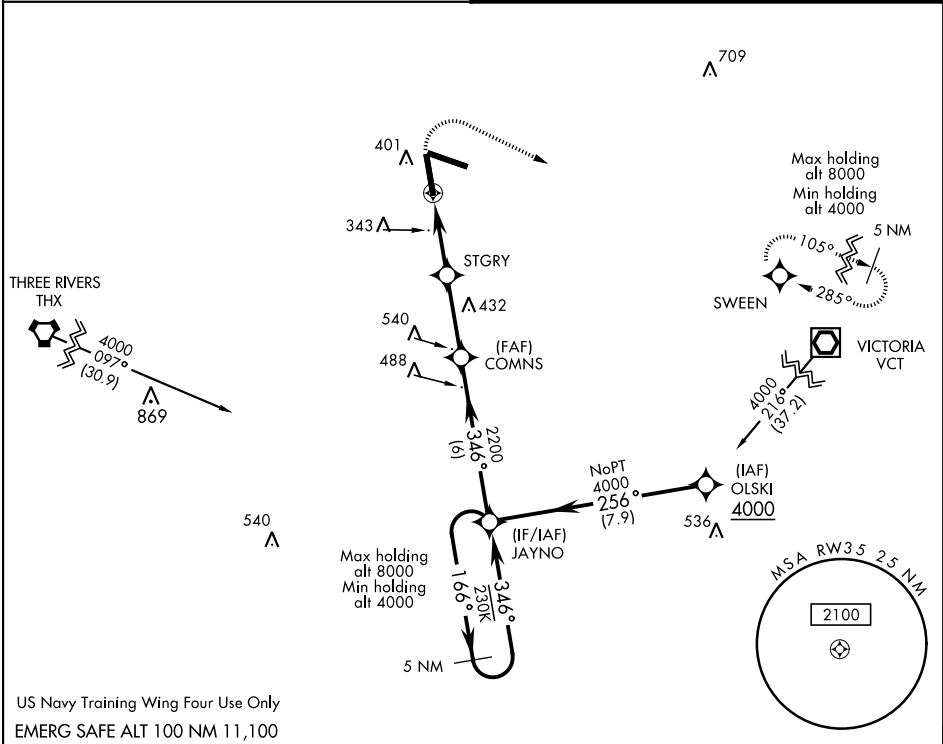
APCH CRS	Rwy Idg
346°	8001
TDZE	307
Arpt Elev	322





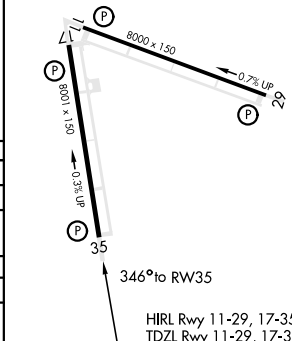
AL-2440 [USN]

GOLIAD NOLF (KNGT)

RNP APCH - DME/DME RNP-0.3 NA.	MISSED APPROACH: Climb to 900 then climbing right turn to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.
When local altimeter setting not received, use Beeville Muni altimeter setting.	

ASOS 353.675	CTAF 132.875 307.075
-----------------	-------------------------



<div>900</div> <div>↑</div>		<div>4000</div> <div></div>	<div>SWEEN</div> <div></div>	VDP NA with Beeville Muni altimeter setting.		<div>JAYNO</div> <div>166° →</div> <div>← 346°</div> <div>4000</div>		<div>ELEV 322</div>	<div>TDZE 307</div>
<div></div> <div>RW35</div>		<div>.9 NM to RW35</div> <div></div>	<div>STGRY</div> <div>1300</div>	<div>COMNS</div> <div>2200</div>	<div>346°</div>	<div>3.00°</div> <div>TCH 53</div>	<div></div>		
CATEGORY	A		B		C		D		
LNAV MDA	640-1		333		(400-1)				
<div>C</div> CIRCLING	760-1 438 (500-1)	780-1 458 (500-1)	780-1½ 458 (500-1½)	880-2 558 (600-2)					
BEEVILLE MUNI ALTIMETER SETTING MINIMA									
LNAV MDA	680-1		373		(400-1)				
<div>C</div> CIRCLING	800-1	478 (500-1)	800-1½ 478 (500-1½)	880-2 558 (600-2)					
<div>HIRL Rwy 11-29, 17-35</div> <div>TDZL Rwy 11-29, 17-35</div>									

RNAV (GPS) RWY 35