
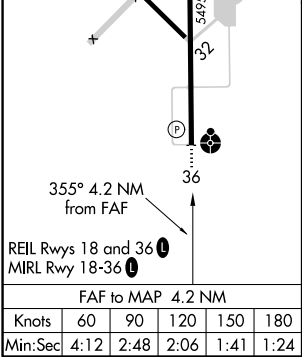


LOC I-DRI 111.1	APP CRS 355°	Rwy Idg TDZE 197 Apt Elev 202
---------------------------	------------------------	---

LOC RWY 36
BEAUREGARD RGNL (DRI)

NA	Inoperative table does not apply. ADF required. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDA 60 feet, and S-36 visibility Cat C ¼ mile.	ODALS MISSED APPROACH: Climb to 1000 then climbing left turn to 1700 direct DXB NDB and hold.
-----------	--	--

AWOS-3PT 118.225	POLK APP CON 123.7 261.3	UNICOM 122.8 (CTAF)
----------------------------	------------------------------------	-------------------------------

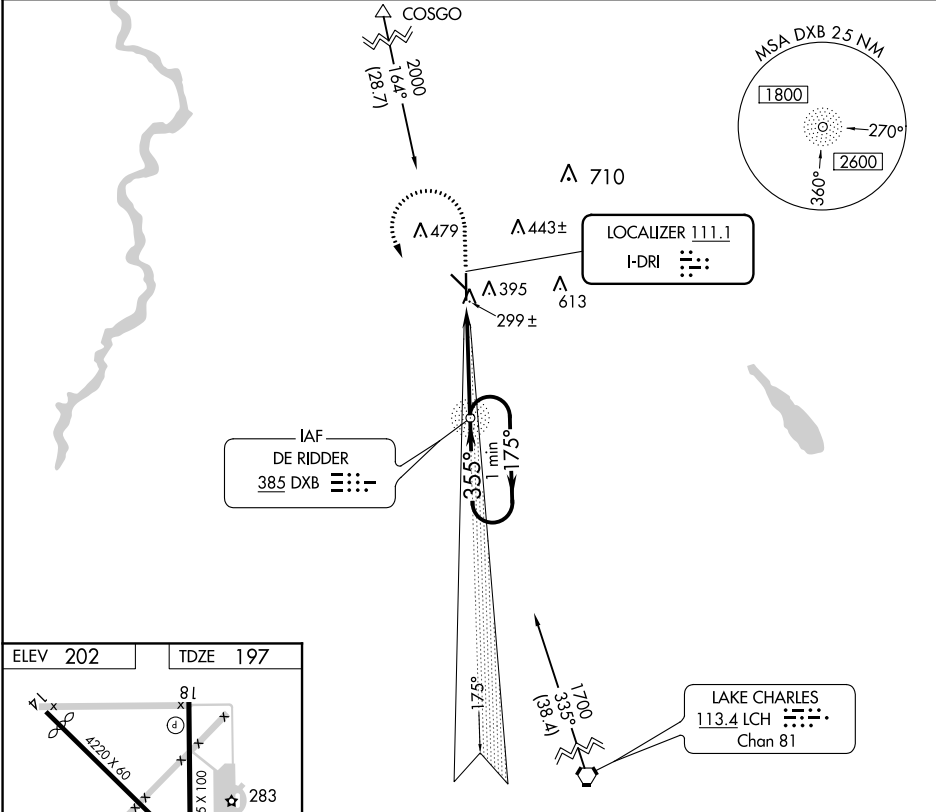

1000	1700	DXB	DXB NDB	One Minute Holding Pattern
CATEGORY	A	B	C	D
S-36	560-1 363 (400-1)			560-1¼ 363 (400-1¼)
CIRCLING	720-1 518 (600-1)		720-1½ 518 (600-1½)	780-2 578 (600-2)

SC-4, 03 DEC 2020 to 31 DEC 2020

SC-4, 03 DEC 2020 to 31 DEC 2020