| WAAS | APP CRS | Rwy Idg | 9800 |
|---|---|---|---|
| CH 61319 | 106° | TDZE | 4 |
| W11A | | Apt Elev | 4 |

# RNAV (GPS) Y RWY 11

## LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALSF-2, increase LNAV/VNAV all Cats visibility to RVR 4000.

ALSF-2

MISSED APPROACH: Climb to 2000 direct ZUBEL and on track 195° to SAFES and hold.

| D-ATIS | NEW ORLEANS APP CON | NEW ORLEANS TOWER | GND CON | CLNC DEL | CPDLC |
|---|---|---|---|---|---|
| 127.55 | WEST 125.5 350.35<br>EAST 133.15 290.3 | 119.5 254.3 | 121.9 273.525 | 126.575 | |

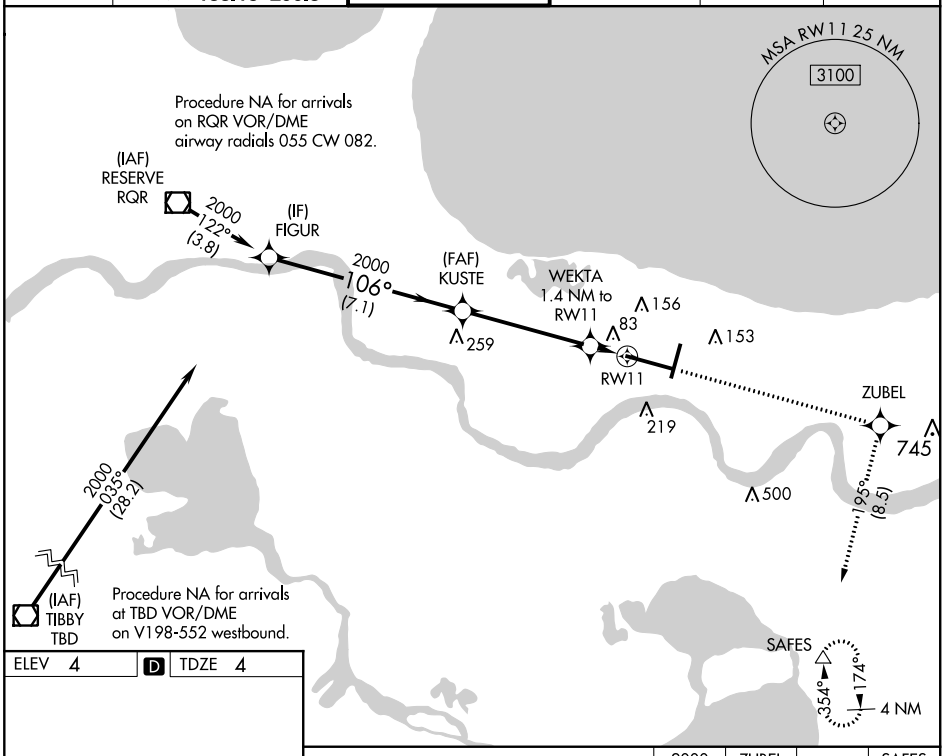


| ELEV 4 | D | TDZE 4 |
|---|---|---|




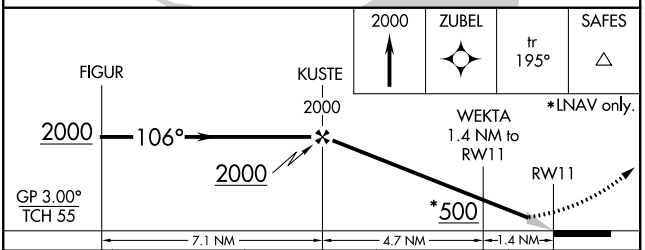


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 204/18 200 (200-½) | | | |
| LNAV/VNAV DA | 254/24 250 (300-½) | | | |
| LNAV MDA | 340/24 336 (400-½) | | 340/26 336 (400-½) | |
| C CIRCLING | 520-1 516 (600-1) | | 580-1½ 576 (600-1½) | 600-2 596 (600-2) |

RLLS Rwy 2
TDZ/CL Rwy 11
HIRL All Runways



SC-4, 03 DEC 2020 to 31 DEC 2020
SC-4, 03 DEC 2020 to 31 DEC 2020