RNAV (GPS) RWY 32

SHREVEPORT RGNL (SHV)

WAAS CH 77913 W32A	APP CRS 321°	Rwy Idg 7976 / TDZE 222 / Apt Elev 258

RNP APCH.

ASR: Rwy 32, helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV Cat A and B visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 2500 direct BABYE and hold.

ATIS	SHREVEPORT APP CON	SHREVEPORT TOWER	GND CON	CLNC DEL
128.45	119.9 335.55	121.4 236.775	121.175 236.775	124.65

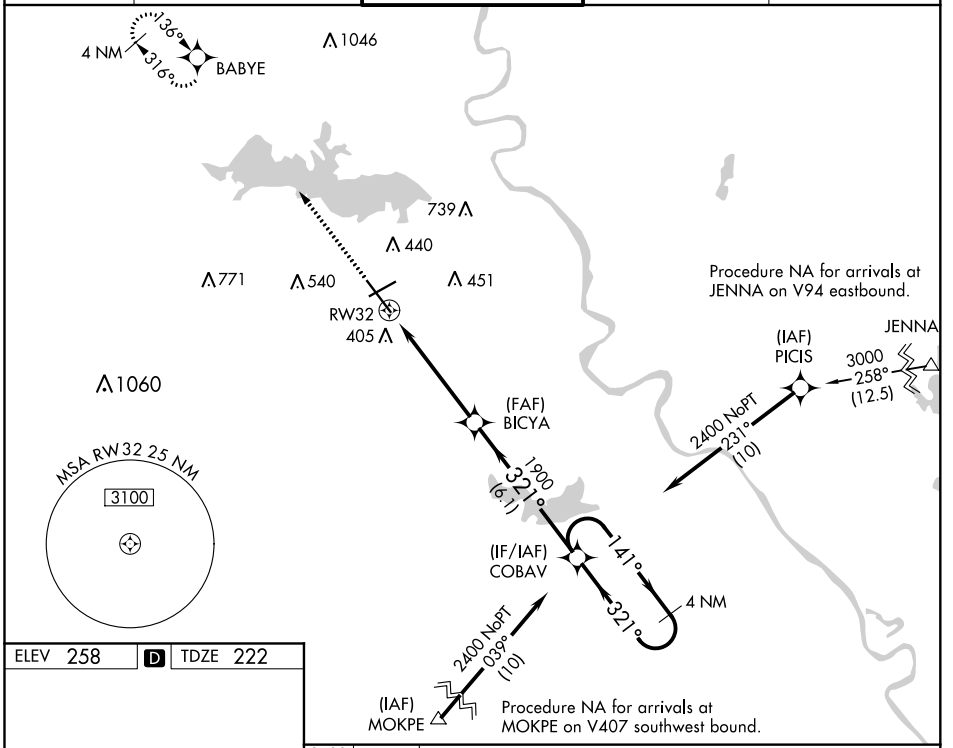

ELEV 258 D TDZE 222

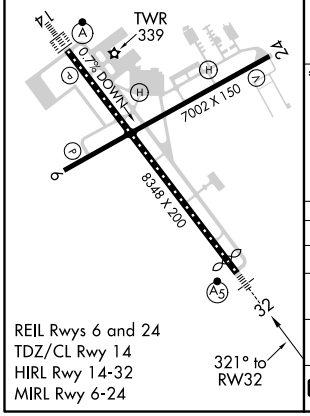

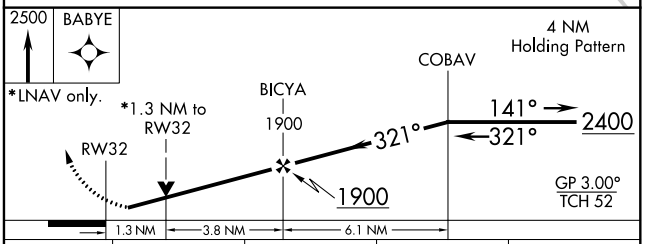

CATEGORY	A	B	C	D
LPV DA	422/40 200 (200-¾)			
LNAV/VNAV DA	623/45 401 (400-⅞)			
LNAV MDA	680/40 458 (500-¾)		680/45 458 (500-⅞)	
C CIRCLING	760-1 502 (600-1)		980-2 722 (800-2)	1100-2¾ 842 (900-2¾)

SC-4, 03 DEC 2020 to 31 DEC 2020
SC-4, 03 DEC 2020 to 31 DEC 2020