
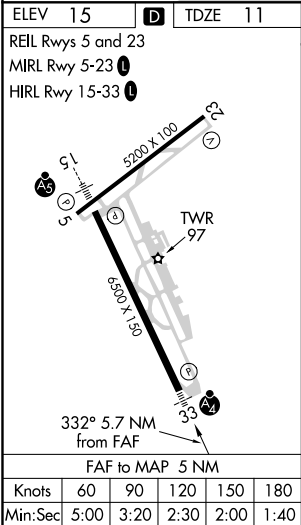



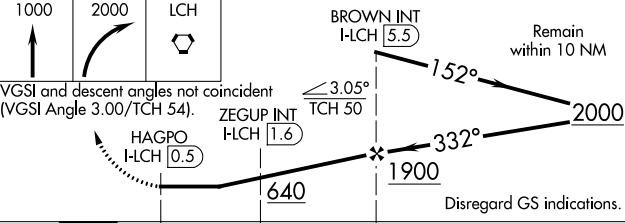


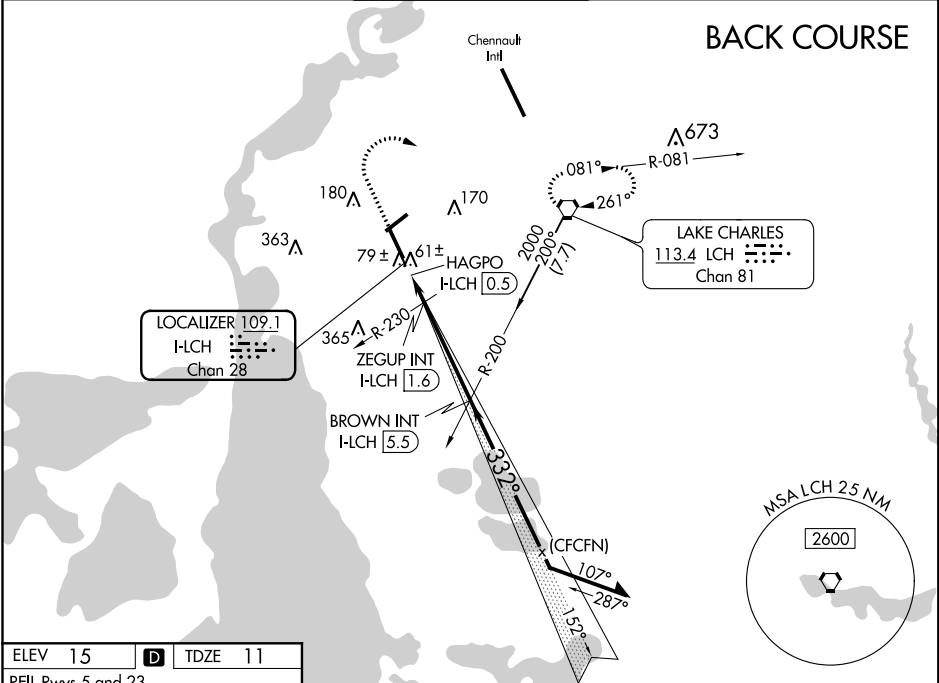

LOC I-LCH 109.1 Chan 28	APP CRS 332°	Rwy Idg 6500 TDZE 11 Apt Elev 15
---	------------------------	---

LOC BC RWY 33
LAKE CHARLES RGNL (LCH)

 For inop MALSF, increase S-33 Cat D visibility to 1¾ mile. For inop MALSF, increase ZEGUP Fix Minimums S-33 Cats C and D visibility to ¾ mile. ASR	 MISSED APPROACH: Climb to 1000 then climbing right turn to 2000 direct LCH VORTAC and hold.
--	---

ATIS 118.75	LAKE CHARLES APP CON* 119.35 353.75	LAKE CHARLES TOWER* 120.7 (CTAF) 0 257.8	GND CON 121.8	CLNC DEL 126.25	UNICOM 122.95
-----------------------	---	--	-------------------------	---------------------------	-------------------------



1000 ↑	2000 ↗	LCH 																	
<table><tr><td>CATEGORY</td><td>A</td><td>B</td><td>C</td><td>D</td></tr><tr><td>S-33</td><td>640-¾</td><td>629 (700-¾)</td><td>640-1½</td><td>629 (700-1½)</td></tr><tr><td> CIRCLING</td><td>640-1</td><td>625 (700-1)</td><td>640-1¾ 625 (700-1¾)</td><td>680-2 665 (700-2)</td></tr></table>					CATEGORY	A	B	C	D	S-33	640-¾	629 (700-¾)	640-1½	629 (700-1½)	 CIRCLING	640-1	625 (700-1)	640-1¾ 625 (700-1¾)	680-2 665 (700-2)
CATEGORY	A	B	C	D															
S-33	640-¾	629 (700-¾)	640-1½	629 (700-1½)															
 CIRCLING	640-1	625 (700-1)	640-1¾ 625 (700-1¾)	680-2 665 (700-2)															
ZEGUP FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)																			
S-33	320-¾ 309 (400-¾)																		
 CIRCLING	440-1 425 (500-1)	480-1 465 (500-1)	580-1½ 565 (600-1½)	680-2 665 (700-2)															