

WAAS CH 77800 W09A	APP CRS 092°	Rwy Idg TDZE 418 Apt Elev 452
--	------------------------	---

RNAV (GPS) RWY 9

UNIVERSITY-OXFORD (UOX)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Olive Branch altimeter setting and increase all DA 94 feet and all MDA 100 feet; increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ⅓ mile, LNAV Cats C, D and Circling Cat C visibilities ¼ mile. Baro-VNAV and VDP NA when using Olive Branch altimeter setting.

MISSED APPROACH:
Climb to 2800 direct FOVAB and hold.

AWOS-3PT 132.725	MEMPHIS CENTER 128.5 381.4	GCO 135.075	UNICOM 123.0 (CTAF) 0
----------------------------	--------------------------------------	-----------------------	---------------------------------

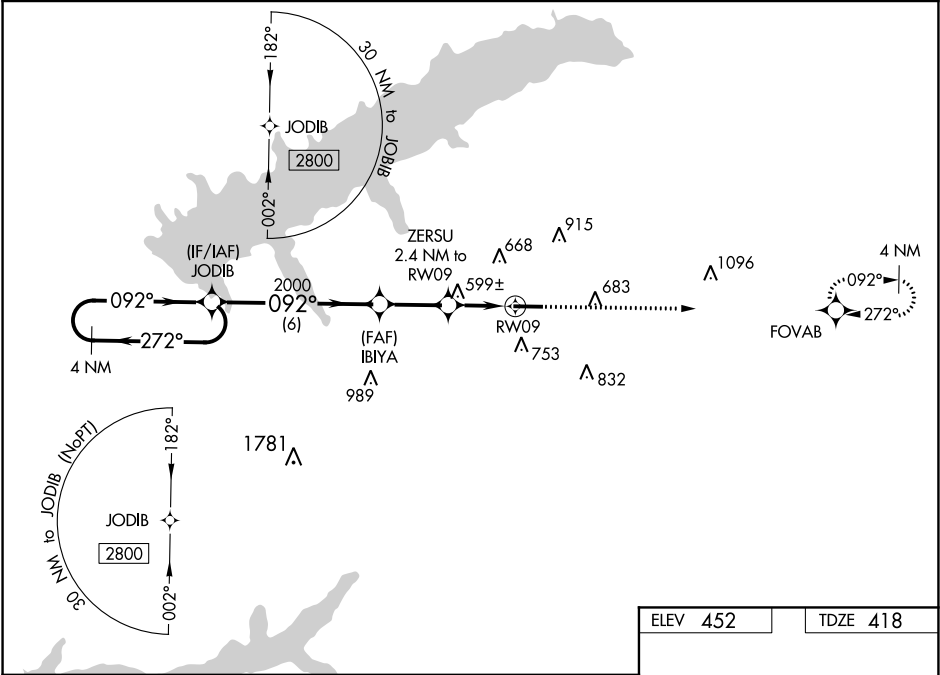

4 NM Holding Pattern		JODIB	IBIYA	ZERSU	RW09
2800		2000	2000	2.4 NM to RW09	
GP 3.00° TCH 40				*1.3 NM to RW09	
2800			*1200		
6 NM		2.5 NM	1.1 NM	1.3 NM	
CATEGORY	A	B	C	D	
LPV DA		668-¾	250 (300-¾)		
LNAV/VNAV DA		872-1½	454 (500-1½)		
LNAV MDA	860-1	442 (500-1)	860-1¾	442 (500-1¾)	
CIRCLING	980-1 528 (600-1)	1060-1 608 (700-1)	1380-2¾ 928 (1000-2¾)	1380-3 928 (1000-3)	

ELEV 452 TDZE 418

2800

FOVAB

*LNAV only.

0.7% UP

5600 X 100

457

092° to RW09

MIRL Rwy 9-27 0
REIL Rwy 27