WAAS	APP CRS		
CH 63203	182°	Rwy Idg	8003
W18A		TDZE	264
		Apt Elev	264

RNAV (GPS) RWY 18
GOLDEN TRIANGLE RGNL (GTR)

A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LPV Cat E visibility ½ mile, increase LNAV/VNAV Cat E and LNAV Cat E visibility ½ mile. When local altimeter setting not received, use Columbus AFB altimeter setting and increase all DA 39 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D/E visibility ⅛ mile. For inop MALSR when using Columbus AFB altimeter setting, increase LPV Cat E visibility ¼ mile, increase LNAV/VNAV Cat E and LNAV Cat E visibility ½ mile. Baro-VNAV and VDP NA when using Columbus AFB altimeter setting.

MALSR (A5)

MISSED APPROACH: Climb to 800 then climbing right turn to 3000 direct HUYKA and hold.

ATIS	COLUMBUS APP CON★	GOLDEN TRIANGLE TOWER★	GND CON	CLNC DEL
126.375	135.6 323.275	118.2 (CTAF) (L) 298.875	135.375 322.475	135.375 322.475

CLNC DEL	UNICOM
126.25 (When twr closed)	122.95

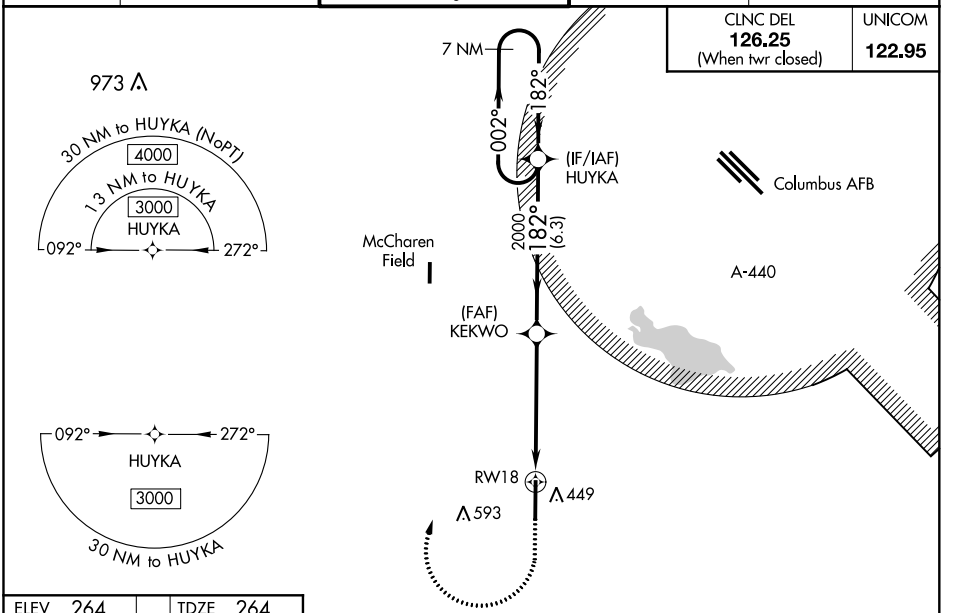

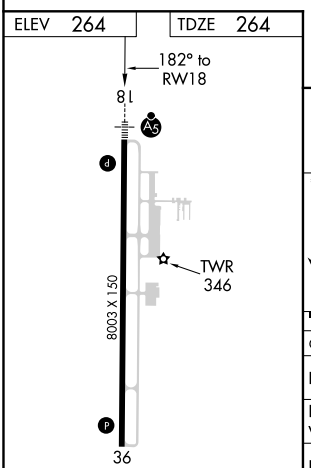

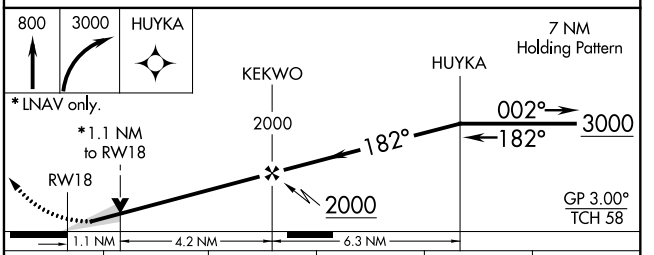

CATEGORY	A	B	C	D	E
LPV DA	464-½ 200 (200-½)				
LNAV/VNAV DA	670-⅞ 406 (500-⅞)				
LNAV MDA	660-½ 396 (400-½)		660-⅝ 396 (400-⅝)		
C CIRCLING	760-1 496 (500-1)		960-2 696 (700-2)	960-2¼ 696 (700-2¼)	960-2½ 696 (700-2½)

SC-4, 03 DEC 2020 to 31 DEC 2020
SC-4, 03 DEC 2020 to 31 DEC 2020