RNAV (GPS) RWY 31

HAMMOND NORTHSHORE RGNL (HDC)

APP CRS	Rwy Idg	5812
315°	TDZE	43
	Apt Elev	47

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting and increase all MDA 100 feet, and increase LNAV Cat C and Circling Cat D visibility ¼ mile and LNAV Cat D visibility ½ mile.
VDP NA with Louis Armstrong New Orleans Intl altimeter setting.

MISSED APPROACH: Climb to 2000 direct HEVOT and hold.

ATIS	NEW ORLEANS APP CON	HAMMOND TOWER ★	GND CON	CLNC DEL
118.325	119.3 350.35	120.575 (CTAF) L	119.85	119.3 (When twr closed)

RADAR REQUIRED

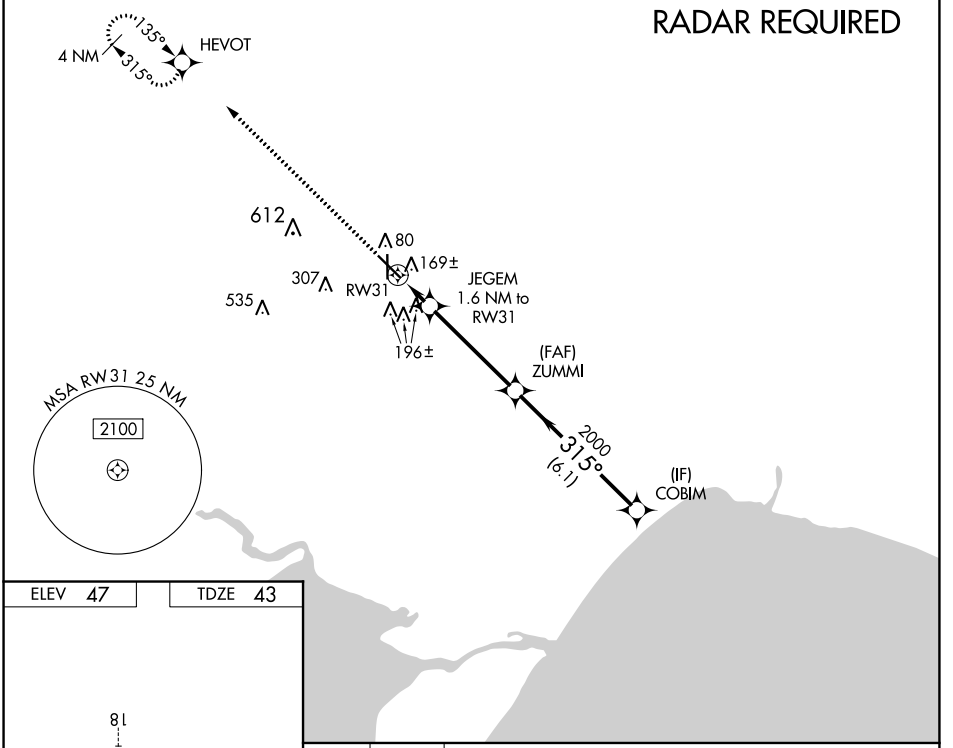

ELEV 47 TDZE 43



315° to RW31

REIL Rwys 13, 31 and 36 L
MIRL Rwys 13-31 and 18-36 L

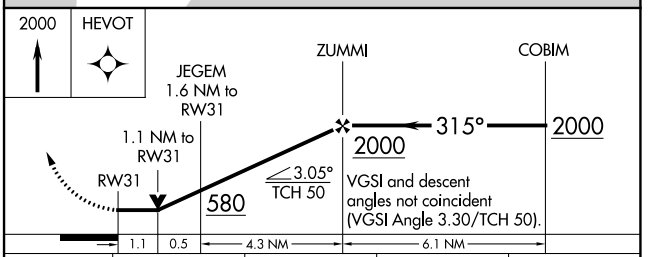

CATEGORY	A	B	C	D
LNAV MDA	460-1	417 (500-1)	460-1¼	417 (500-1¼)
CIRCLING	500-1	453 (500-1)	500-1½ 453 (500-1½)	620-2 573 (600-2)

SC-4, 03 DEC 2020 to 31 DEC 2020
SC-4, 03 DEC 2020 to 31 DEC 2020