


VOR/DME VCT 109.0 Chan 27	APP CRS 307°	Rwy Idg TDZE 106 Apt Elev 115	VOR/DME RWY 31R VICTORIA RGNL (VCT)	
---	------------------------	---	---	--

T When local altimeter setting not received, use Port Lavaca altimeter setting and increase all MDA 60 feet. Increase S-31R Cats C/D/E visibility to 1½ mile. VDP NA when using Port Lavaca altimeter setting.

A

MISSED APPROACH: Climb to 2000 direct VCT VOR/DME and hold.

ATIS 119.025	HOUSTON CENTER 135.05 353.6	VICTORIA TOWER ★ 126.075 (CTAF) 0 257.95	GND CON 120.525 239.25	UNICOM 122.7
------------------------	---------------------------------------	---	----------------------------------	------------------------

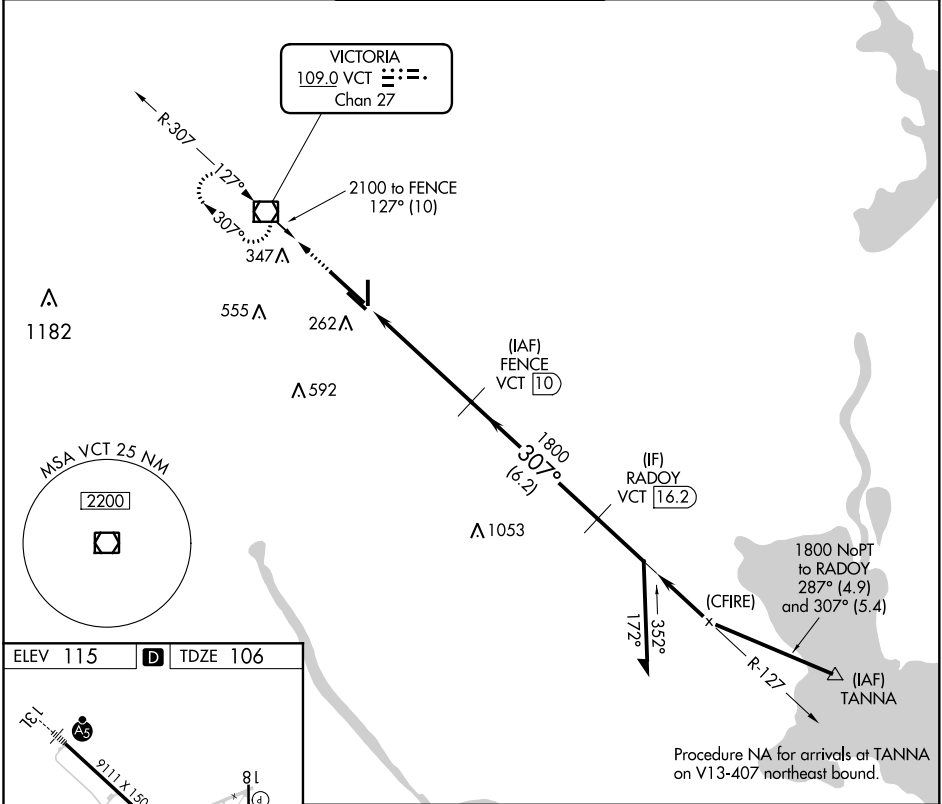

ELEV 115 D TDZE 106

2000	VCT	FENCE VCT 10	Remain within 15 NM		
CATEGORY	A	B	C	D	E
S-31R	540-1	434 (500-1)	540-1¼ 434 (500-1¼)		
CIRCLING	580-1	465 (500-1)	580-1½ 465 (500-1½)	680-2 565 (600-2)	NA