RNAV (GPS) RWY 35

EASTERWOOD FIELD (CLL)

WAAS CH 63122 W35A	APP CRS 346°	Rwy ldg 7000 TDZE 311 Apt Elev 321

RNP APCH.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LPV Cat E and LNAV/VNAV all Cats visibility to ¾ SM, increase LNAV Cat E visibility to 1⅜ SM.

MALSR (A5)

MISSED APPROACH: Climb to 2100 direct ZAKBU and hold.

ATIS	HOUSTON APP CON	EASTERWOOD TOWER★	GND CON	CLNC DEL	CLNC DEL	UNICOM
126.85	134.3 360.85	118.5 (CTAF) L 284.7	128.7 284.7	128.7	120.4 (when twr closed)	122.95

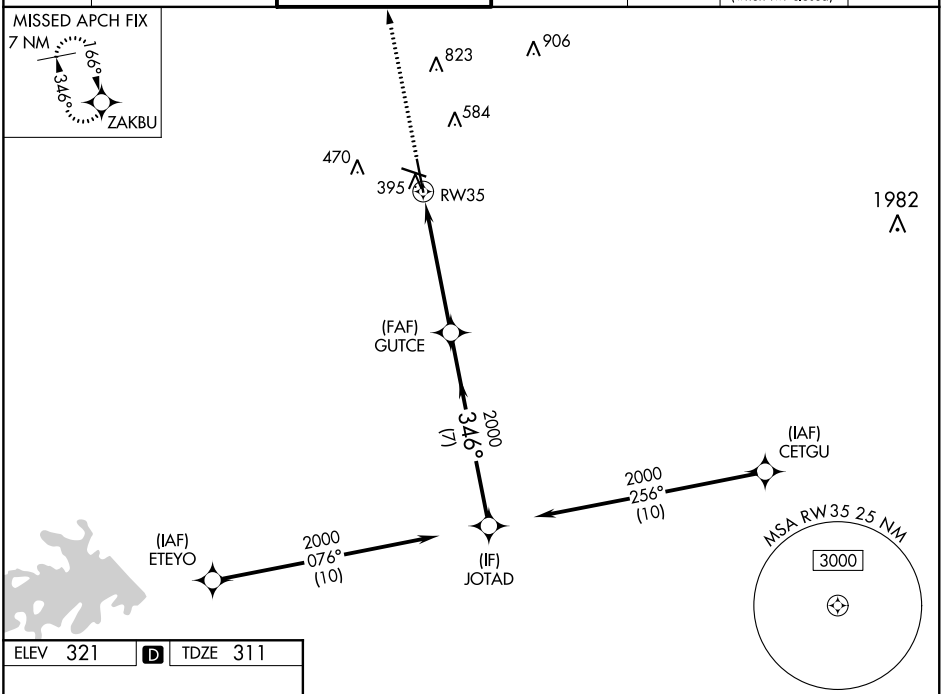

ELEV 321 D TDZE 311

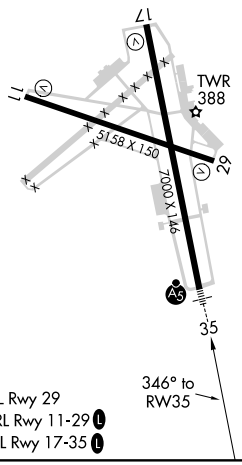

REIL Rwy 29
MIRL Rwy 11-29 L
HIRL Rwy 17-35 L

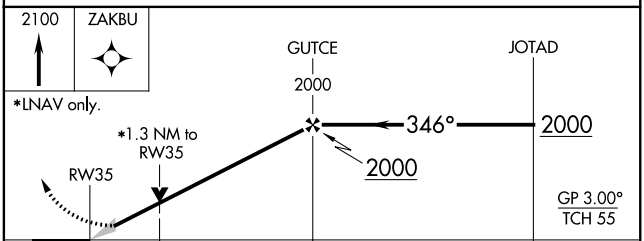

CATEGORY	A	B	C	D	E
LPV DA	511-½ 200 (200-½)				
LNAV/VNAV DA	563-½ 252 (300-½)				
LNAV MDA	760-½ 449 (500-½)		760-⅞ 449 (500-⅞)		
C CIRCLING	860-1 539 (600-1)	880-1 559 (600-1)	1000-2 679 (700-2)	1180-2¾ 859 (900-2¾)	1180-3 859 (900-3)

SC-5, 03 DEC 2020 to 31 DEC 2020
SC-5, 03 DEC 2020 to 31 DEC 2020