WAAS CH **40127** **W13A** | APP CRS **131°** | Rwy Idg **5107** TDZE **45** Apt Elev **45**

RNAV (GPS) RWY 13

BAY CITY RGNL (BYY)

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Rwy 13, 31 helicopter visibility reduction below 1 SM NA. RADAR required. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Palacios altimeter setting and increase all DA 63 feet and all MDA 80 feet; increase LNAV visibility Cat C ¼ mile. VDP and Baro-VNAV N/A when using Palacios altimeter setting.

MISSED APPROACH: Climb to 2000 direct LEMUR and hold.

AWOS-3	HOUSTON CENTER	UNICOM
118.075	**128.6 360.8**	**122.8** (CTAF) L

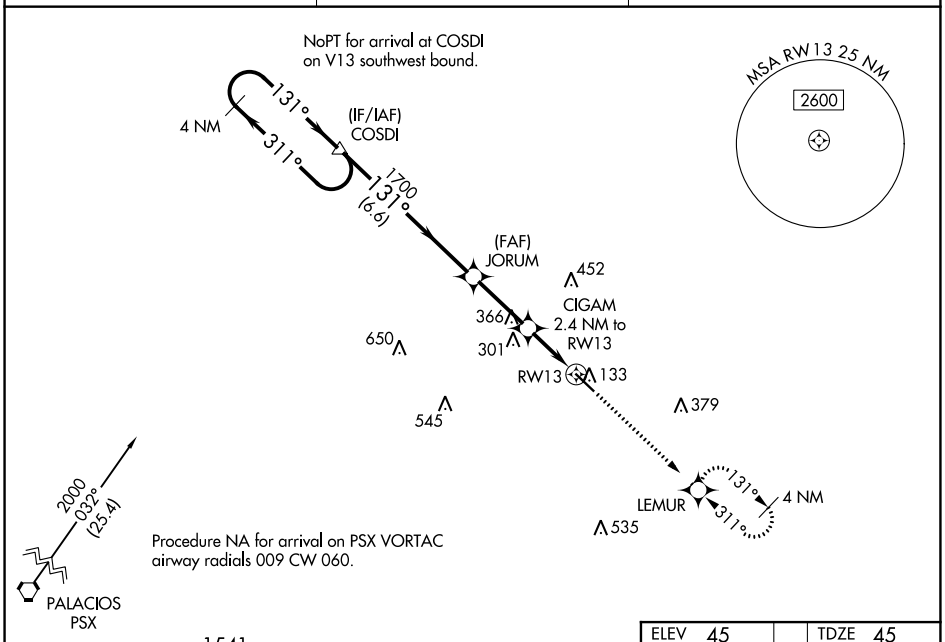

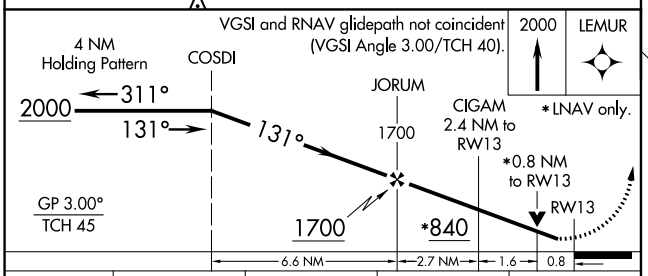

CATEGORY	A	B	C	D
LPV DA	295-1	250 (300-1)		NA
LNAV/VNAV DA	295-1	250 (300-1)		NA
LNAV MDA	460-1	415 (500-1)	460-1⅛ 415 (500-1⅛)	NA
C CIRCLING	500-1	455 (500-1)	620-1½ 575 (600-1½)	NA

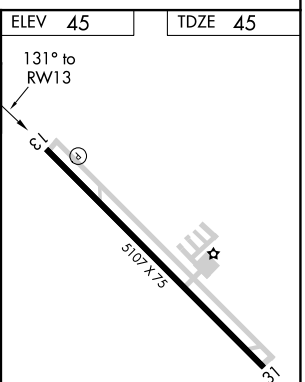

SC-5, 03 DEC 2020 to 31 DEC 2020
SC-5, 03 DEC 2020 to 31 DEC 2020