
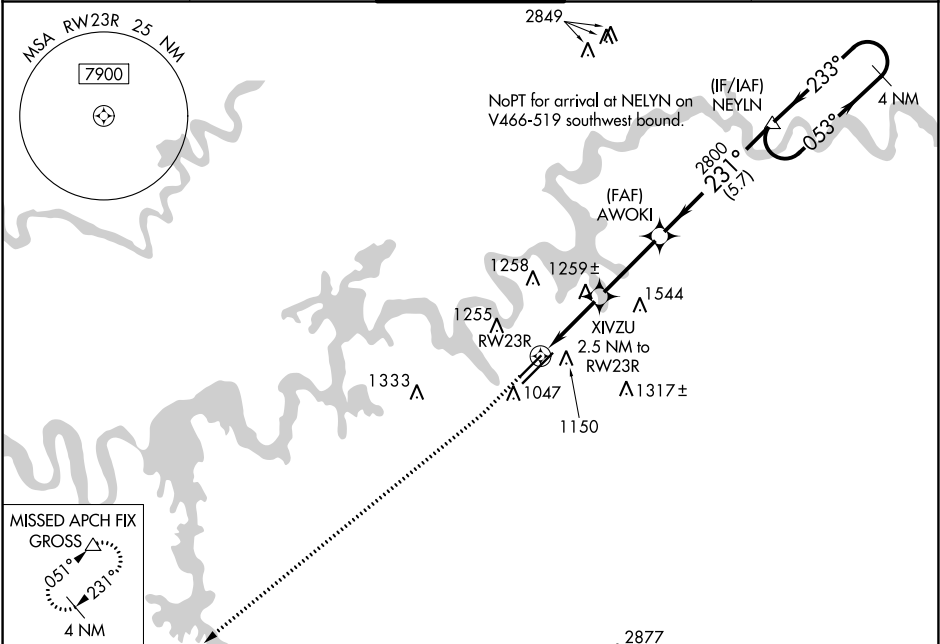


| | | |
|--|------------------------|---|
| WAAS CH 81902 W23A | APP CRS 231° | Rwy ldg TDZE 981 Apt Elev 981 |
|--|------------------------|---|

RNAV (GPS) RWY 23R
MC GHEE TYSON (T'YS)

| | | |
|--|---|--|
|  ASR | For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. | MISSED APPROACH: Climb to 1600 then climb to 3000 direct direct GROSS and hold. |
|--|---|--|

| | | | | |
|-----------------------|---|---------------------------------------|-------------------------------|---------------------------|
| ATIS 128.35 | KNOXVILLE APP CON 123.9 360.8 | KNOXVILLE TOWER 121.2 257.8 | GND CON 121.9 348.6 | CLNC DEL 121.65 |
|-----------------------|---|---------------------------------------|-------------------------------|---------------------------|



| | | | | | | | | |
|--------------|--------------------|----------|---------------------------|------|--------------------|-----------------------|--------------------------------------|-----------------|
| ELEV 981 | D | TDZE 981 | 1600 | 3000 | GROSS | AWOKI 2800 | NELYN Holding Pattern 053° 233° 3500 | GP 3.00° TCH 56 |
| | | | *LNAV only. | | | XIVZU 2.5 NM to RW23R | *1.5 NM to RW23R | RW23R 1820 |
| | | | 1.5 NM 1 NM 3.1 NM 5.7 NM | | | | | |
| CATEGORY | A | | B | | C | | D | |
| LPV DA | 1181/18 | | 200 (200-½) | | | | | |
| LNAV/VNAV DA | 1535-1⅜ | | 554 (600-1⅜) | | | | | |
| LNAV MDA | 1520/24 | | 539 (600-½) | | 1520/55 | | 539 (600-1) | |
| CIRCLING | 1520-1 539 (600-1) | | 1620-1 639 (700-1) | | 1660-2 679 (700-2) | | 1900-3 919 (1000-3) | |