

LOC/DME I-SSX 109.35 Chan 30 (Y)	APP CRS 201°	Rwy Idg TDZE Apt Elev 8000 551 599
---	------------------------	--



ILS or LOC/DME RWY 20L
NASHVILLE INTL (BNA)

Simultaneous approach authorized with Rwy 20R.
DME required.
****RVR 1800 authorized with the use of FD or AP or HUD to DA.**

MALSR

MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 on heading 040° and BNA VORTAC R-072 to LENON/BNA 25.1 DME and hold.

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6	CLNC DEL 126.05	CPDLC
------------------------	---	---------------------------------------	-------------------------------	---------------------------	-------

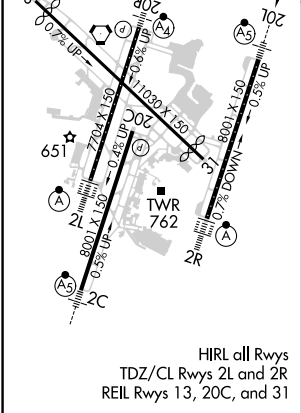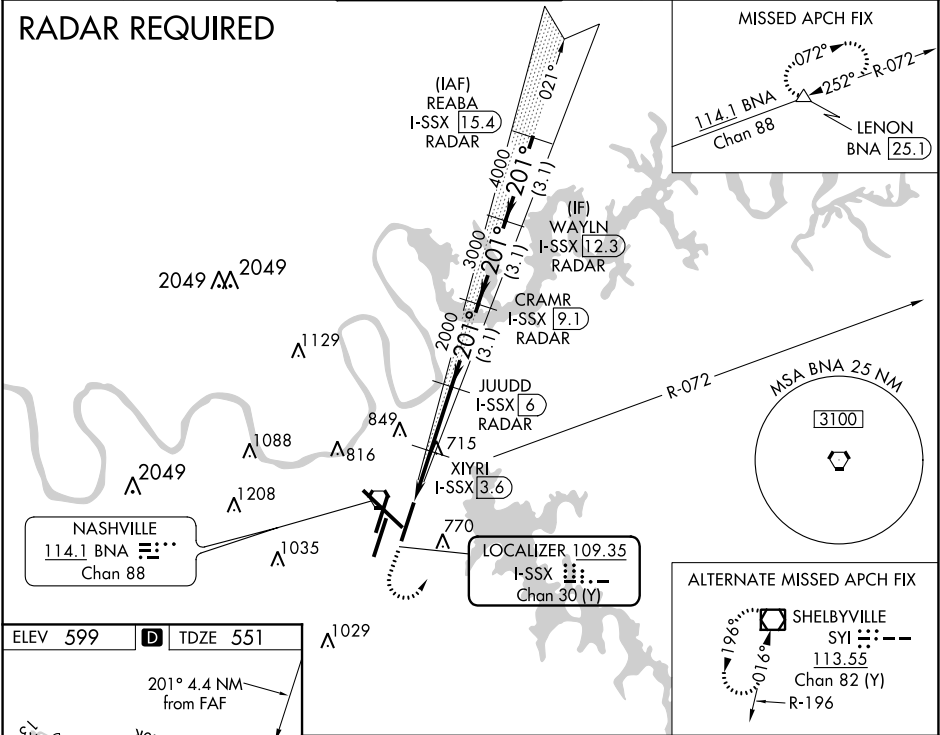

ELEV 599	TDZE 551				
1300 3000 BNA R-072 LENON					
*LOC only.					
1220* 2000 3000 4000 5000					
GS 3.00° TCH 47					
CATEGORY	A	B	C	D	
S-ILS 20L	** 751/24 200 (200-½)				
S-LOC 20L	980/24	429 (400-½)	980/40	429 (400-¾)	
CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1200-1¾ 601 (700-1¾)	1380-2½ 781 (800-2½)	