


|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>65913</b><br><b>W31A</b> | APP CRS<br><b>316°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>9487</b><br><b>578</b><br><b>599</b> |
|--|------------------------|-----------------------------|---|


RNAV (GPS) Y RWY 31  
NASHVILLE INTL (BNA)

|   |   |
|---|---|
| <br>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F).<br>DME/DME RNP-0.3 NA. | MISSED APPROACH: Climb to 3100 direct JARAS and hold. |
|---|---|

|                        |   |                                       |                               |                           |       |
|------------------------|---|---------------------------------------|-------------------------------|---------------------------|-------|
| D-ATIS<br><b>135.1</b> | NASHVILLE APP CON<br><b>118.4 360.7</b> | NASHVILLE TOWER<br><b>118.6 257.8</b> | GND CON<br><b>121.9 348.6</b> | CLNC DEL<br><b>126.05</b> | CPDLC |
|------------------------|---|---------------------------------------|-------------------------------|---------------------------|-------|

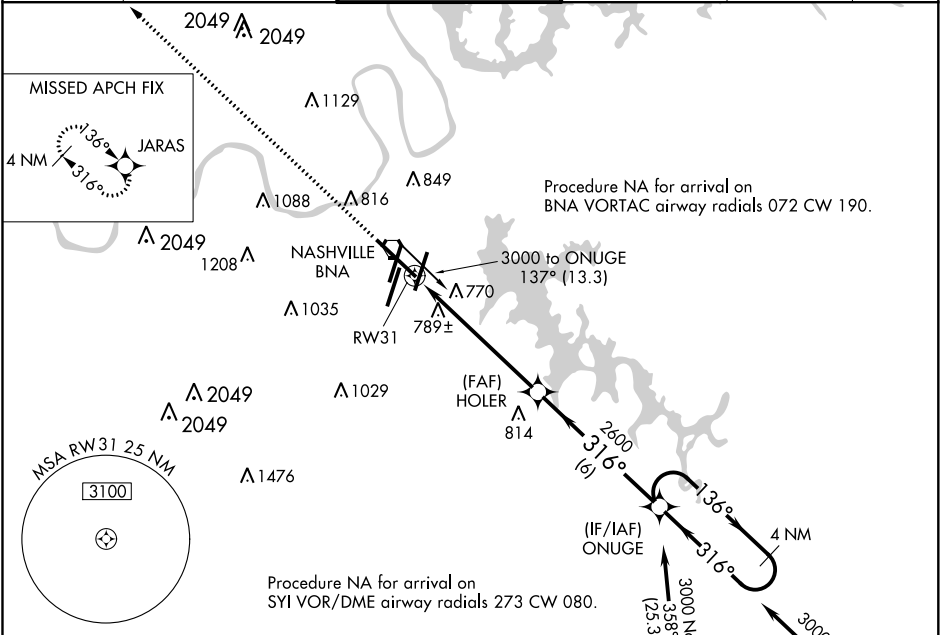

|          |          |          |
|----------|----------|----------|
| ELEV 599 | <b>D</b> | TDZE 578 |
|----------|----------|----------|

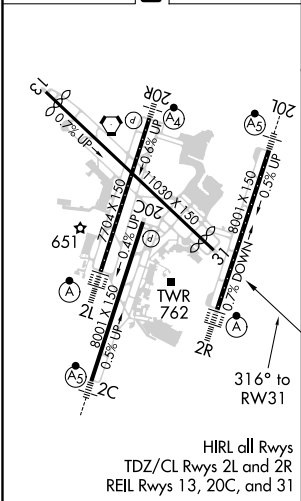

3100

↑

JARAS

\*LNAV only.

RW31

\*1.4 NM to RW31

HOLER

2600

316°

ONUGE

4 NM Holding Pattern

136°

3000

316°

GP 3.00°

TCH 52

1.4 NM

4.8 NM

6 NM

| CATEGORY     | A                     | B                     | C                             | D                             |
|--------------|-----------------------|-----------------------|-------------------------------|-------------------------------|
| LPV DA       | 778-3/4               |                       | 200 (200-3/4)                 |                               |
| LNAV/VNAV DA | 1061-1 5/8            |                       | 483 (500-1 5/8)               |                               |
| LNAV MDA     | 1060-1                | 482 (500-1)           | 1060-1 3/8                    | 482 (500-1 3/8)               |
| CIRCLING     | 1100-1<br>501 (600-1) | 1120-1<br>521 (600-1) | 1200-1 3/4<br>601 (700-1 3/4) | 1380-2 1/2<br>781 (800-2 1/2) |