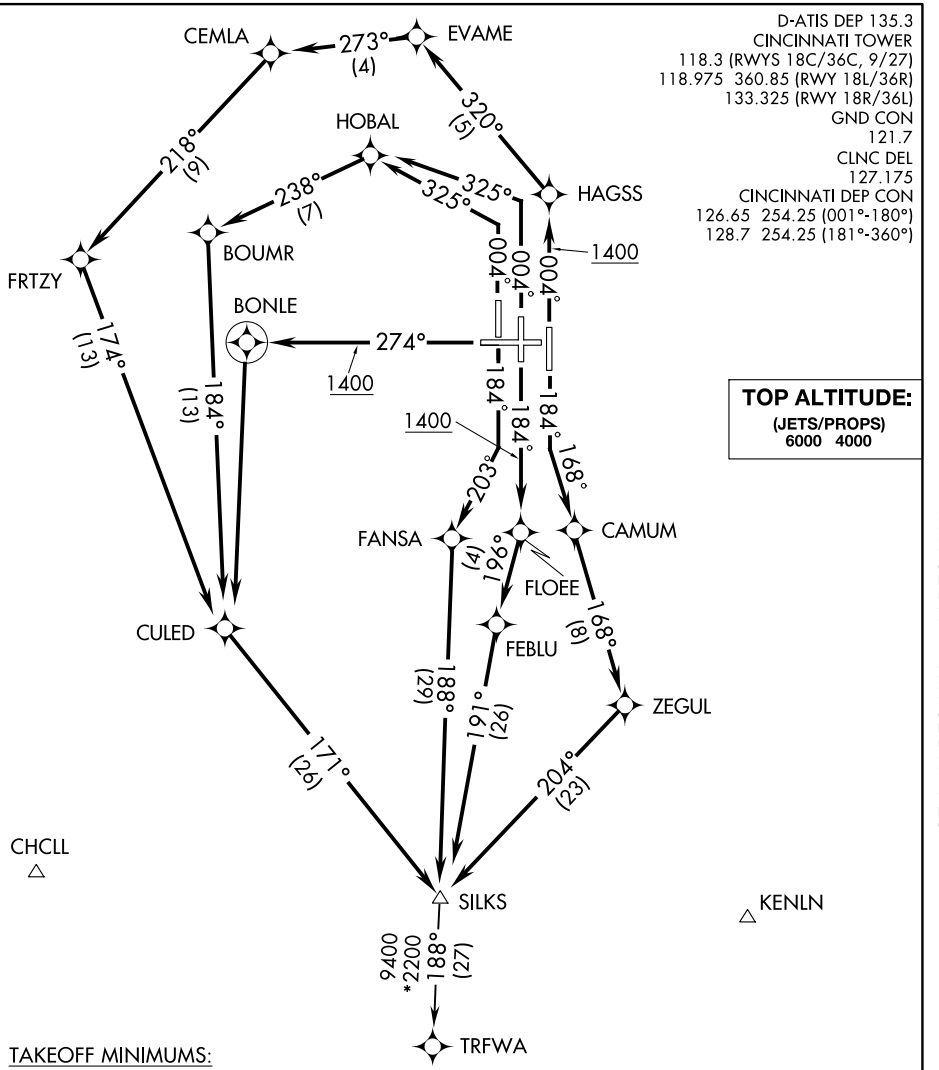

TAKEOFF MINIMUMS:
Rwy 9: NA-ATC.
Rwys 18L, 18C, 18R, 27, 36R, 36C, 36L: Standard
with minimum climb of 500' per NM to 1400.

NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: DME/DME/IRU or GPS required.
NOTE: Radar required.
NOTE: RNAV 1.
NOTE: Transponder code will be issued via PDC or Cincinnati CLNC DEL.
NOTE: Accelerate to 250K, if unable, advise ATC.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-1, 03 DEC 2020 to 31 DEC 2020
SE-1, 03 DEC 2020 to 31 DEC 2020