
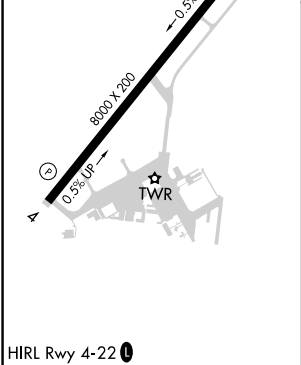


VORTAC MEM	APP CRS	Rwy Idg	8000
117.5	195°	TDZE	319
Chan 122		Apt Elev	319

VOR or TACAN RWY 22
MILLINGTON-MEMPHIS (NQA)

DME required.	MALSR	MISSED APPROACH: Climb to 900, then climbing right turn to 2000 on MEM VORTAC R-015 to MNFRD/27 DME and hold, continue climb-in-hold to 2000.
Rwy 22 helicopter visibility reduction below 3/4 SM NA. Hop table does not apply.		

AWOS-3	MEMPHIS APP CON	MILLINGTON TOWER ★	GND CON	UNICOM
118.925	119.1 291.6 125.8 338.3 (176°-355°) (356°-175°)	120.25 (CTAF) 0 340.2	121.375	122.95

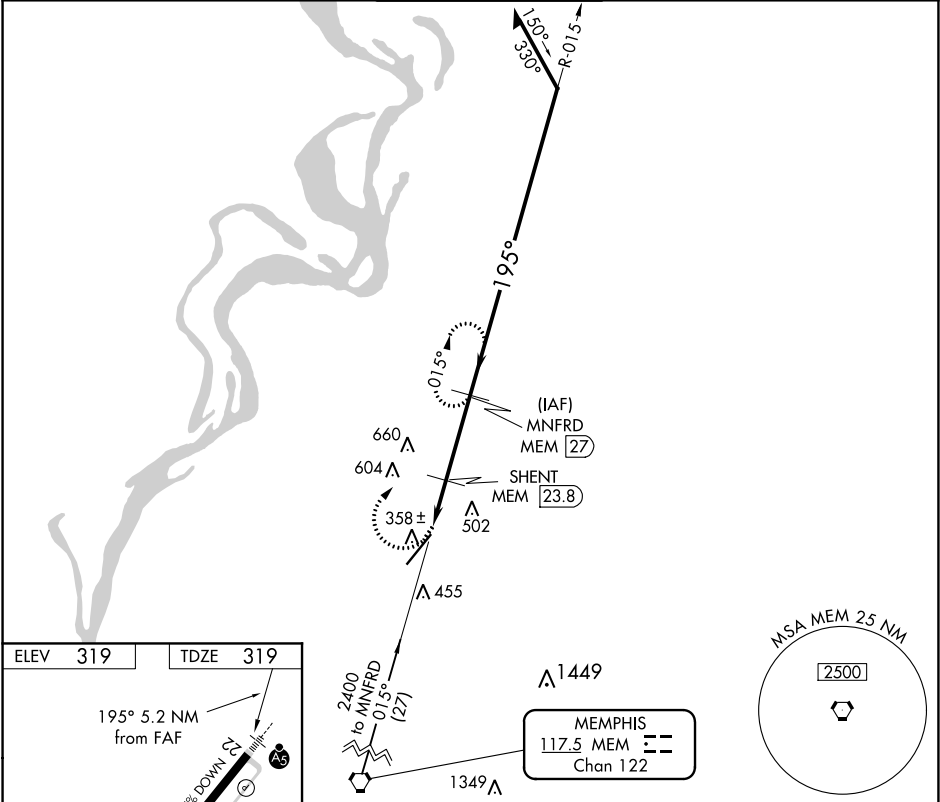

900	2000	MEM R-015	MNFRD MEM 27	MNFRD MEM 27	Remain within 15 NM
		SHENT MEM 23.8			
		MEM 21.8			
		3.00° TCH 55			
		1020			
		2 NM	3.2 NM		
CATEGORY	A	B	C	D	E
S-22	880-1	561 (600-1)	880-1 5/8	561 (600-1 5/8)	
CIRCLING	880-1	561 (600-1)	920-1 3/4 601 (700-1 3/4)	960-2 641 (700-2)	960-2 1/4 641 (700-2 1/4)