




WAAS CH 48817 W02A	APP CRS 016°	Rwy Idg TDZE Apt Elev	5001 580 580
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 2

HENRY COUNTY (PHT)

RNP APCH.	ODALS	MISSED APPROACH: Climb to 3000 direct CAGAK and hold.
 Inop table does not apply to LPV and LNAV/VNAV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.		

AWOS-3 118.825	MEMPHIS CENTER 134.65 316.15	UNICOM 123.0 (CTAF)
--------------------------	--	-------------------------------

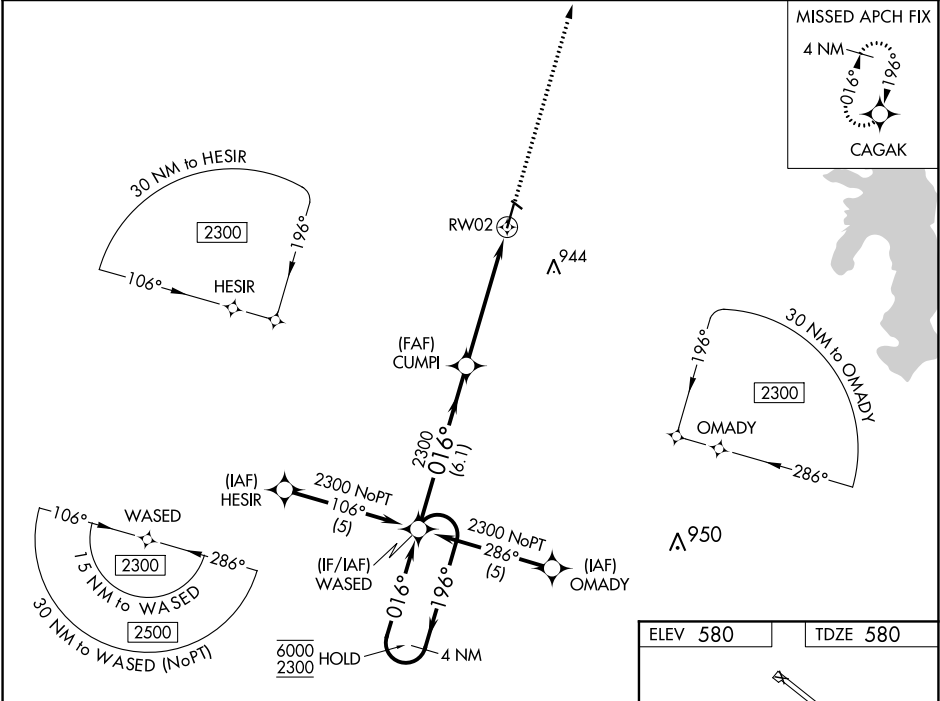

<div>4 NM Holding Pattern</div> <div><div>6000</div><div>2300</div></div> <div>GP 3.00° TCH 41</div>		<div>VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).</div> <div>WASED</div> <div>CUMPI</div> <div>2300</div> <div>2300</div> <div>6.1 NM</div> <div>4 NM</div> <div>1.2 NM</div>		<div>3000</div> <div>↑</div>	<div>CAGAK</div> <div>✦</div>	
<div>←196°</div> <div>016°→</div> <div>016°</div> <div>*1.2 NM to RW02</div> <div>*LNAV only</div> <div>RW02</div>						
CATEGORY		A	B	C	D	
LPV DA		780-3 ³ / ₄		200 (200-3 ³ / ₄)		
LNAV/ VNAV DA		1087-1 ³ / ₄		507 (600-1 ³ / ₄)		
LNAV MDA		1020-3 ³ / ₄	440 (500-3 ³ / ₄)	1020-1 ¹ / ₄ 440 (500-1 ¹ / ₄)	1020-1 ¹ / ₂ 440 (500-1 ¹ / ₂)	
CIRCLING		1080-1	500 (500-1)	1080-1 ¹ / ₂ 500 (500-1 ¹ / ₂)	1140-2 560 (600-2)	

