

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 42717 W20A | APP CRS 196° | Rwy Idg TDZE Apt Elev | 5001 571 580 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 20


HENRY COUNTY (PHT)

RNP APCH.

When local altimeter setting not received, procedure NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH:
Climb to 2300 direct
WASED and hold.


| | | |
|--------------------------|--|-------------------------------|
| AWOS-3 118.825 | MEMPHIS CENTER 134.65 316.15 | UNICOM 123.0 (CTAF) |
|--------------------------|--|-------------------------------|

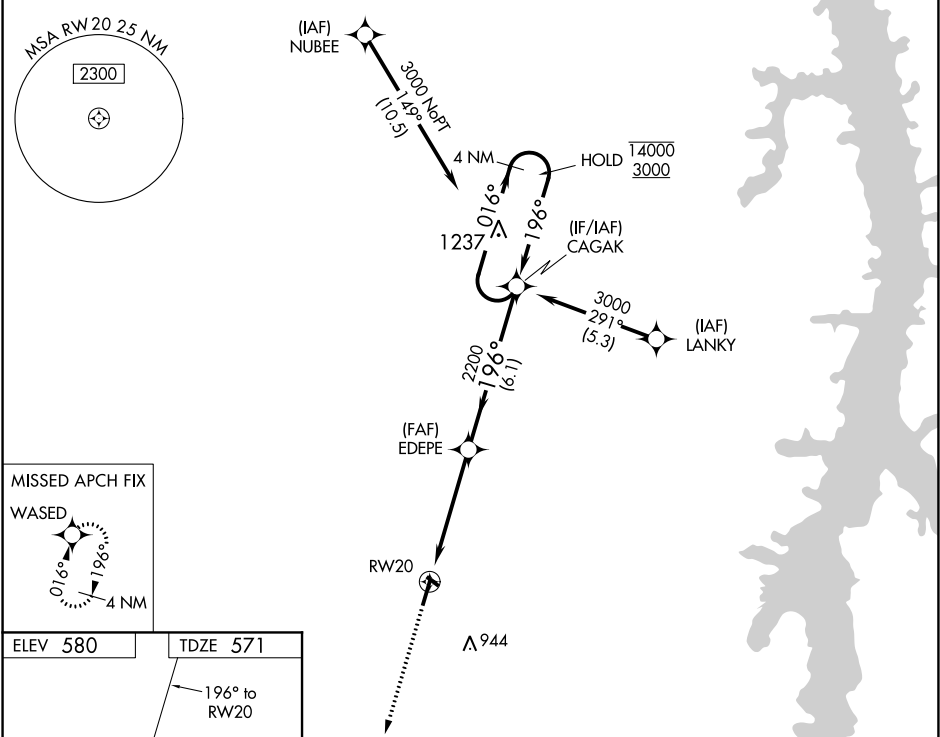

MISSED APCH FIX

WASED

016° 196° 4 NM

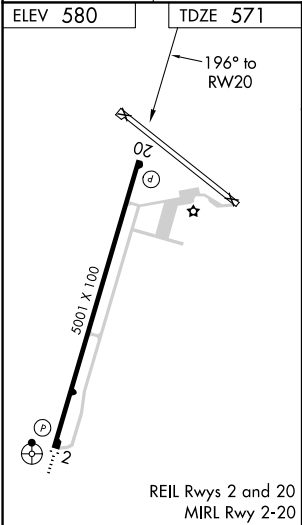

| | | | | | |
|-------------------|--------|---|-------------------------|-------------------------|-----------------------------|
| 2300 | WASED | VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21). | | | 4 NM Holding Pattern |
| *LNAV only. | | EDEPE | 2200 | 196° | 016° → 14000 ← 196° 3000 |
| *1.5 NM to RWY 20 | | 2200 | 2200 | 196° | GP 3.00° TCH 45 |
| 1.5 NM | | 3.4 NM | 6.1 NM | | |
| CATEGORY | A | B | C | D | |
| LPV DA | 821-1 | | 250 (300-1) | | |
| LNAV/VNAV DA | 917-1¼ | | 346 (400-1¼) | | |
| LNAV MDA | 1060-1 | 489 (500-1) | 1060-1½ 489 (500-1½) | 1060-1½ 489 (500-1½) | |
| CIRCLING | 1080-1 | 500 (500-1) | 1080-1½ 500 (500-1½) | 1140-2 560 (600-2) | |