RNAV (GPS) RWY 24

MAURY COUNTY (MRC)

WAAS	APP CRS	Rwy Idg	6000
CH 69515	235°	TDZE	681
W24A		Apt Elev	681

RNP APCH.

Inop table does not apply to LNAV/VNAV Cats A, B, and C and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Rwy 24 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Nashville Intl altimeter setting and increase all DA 109 feet and all MDA 120 feet and increase LPV all Cats visibility ½ mile, increase LNAV/VNAV all Cats visibility ½ mile, and LNAV Cats C and D visibility ¼ mile, and increase Circling Cats C and D visibility ½ mile. Baro-VNAV and VDP NA when using Nashville Intl altimeter setting.

ODALS

MISSED APPROACH: Climb to 3000 direct CEMVU and hold.

AWOS-3	MEMPHIS CENTER	UNICOM
128.625	125.85 379.25	122.8 (CTAF) L

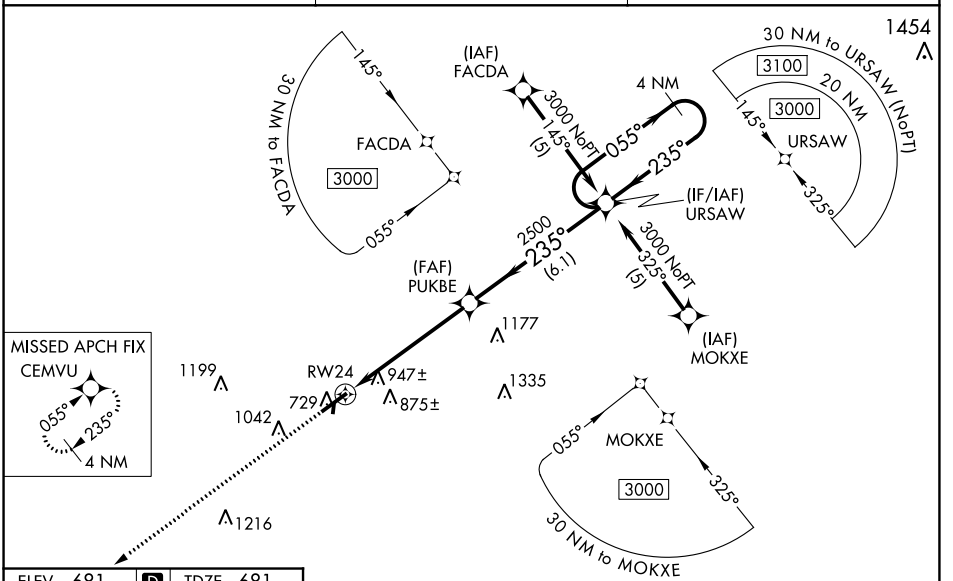

ELEV 681 D TDZE 681



MIRL Rwy 6-24
REIL Rwy 6
REIL Rwy 24 L

3000 CEMVU

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 42).

*LNAV only.

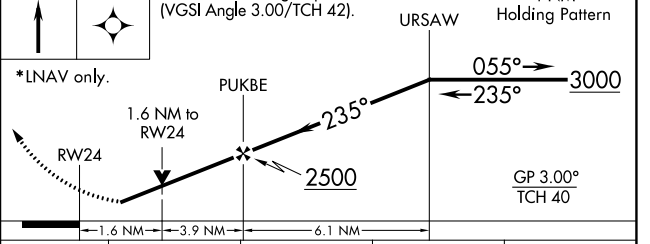

CATEGORY	A	B	C	D
LPV DA	981-1 300 (300-1)			
LNAV/VNAV DA	1329-2¼ 648 (700-2¼)			
LNAV MDA	1220-¾ 539 (600-¾)		1220-1½ 539 (600-1½)	1220-1¾ 539 (600-1¾)
CIRCLING	1320-1 639 (700-1)		1380-2 699 (700-2)	1420-2¼ 739 (800-2¼)

SE-1, 03 DEC 2020 to 31 DEC 2020
SE-1, 03 DEC 2020 to 31 DEC 2020