WAAS CH **90434** **W05A** | APP CRS **051°** | Rwy Idg **5506** TDZE **1545** Apt Elev **1545**

RNAV (GPS) RWY 5

SCOTT MUNI (SCX)

T A NA — Baro-VNAV NA when using Monticello altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 47°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Monticello altimeter setting: increase LPV DA to 2180 feet, LNAV/VNAV DA to 2092 feet and all visibilities ¾ mile; increase all MDA 240 feet and LNAV Cat C visibility ¾ mile and Circling Cat C 1 mile. Night landing: Rwy 5 NA. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 4800 direct COPEP and hold.

AWOS-3	INDIANAPOLIS CENTER	UNICOM
135.025	**124.625 371.925**	**122.8** (CTAF) L

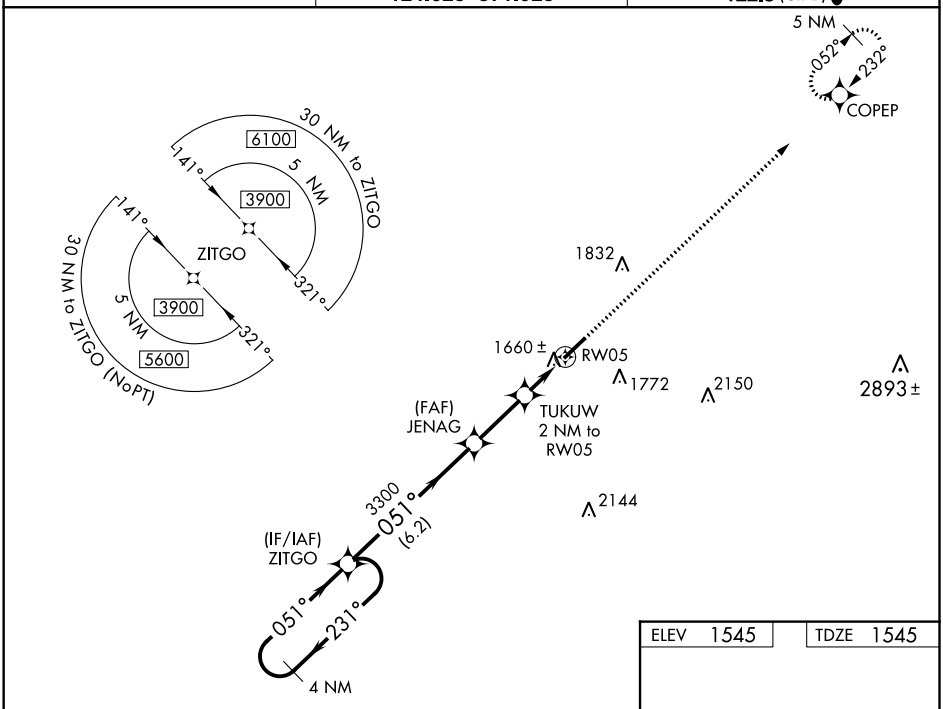

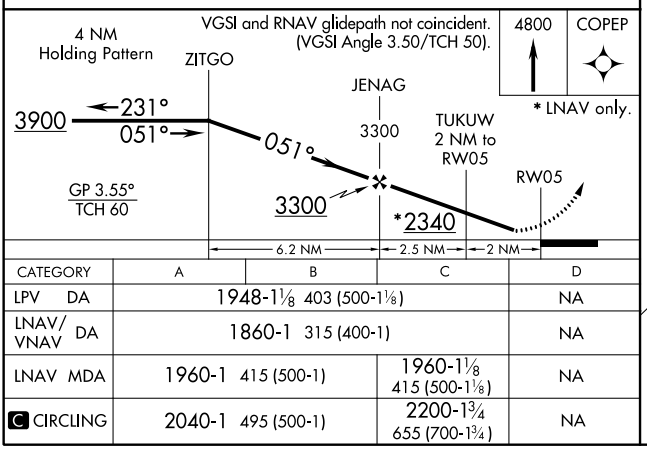

CATEGORY	A	B	C	D
LPV DA	1948-1⅛ 403 (500-1⅛)			NA
LNAV/VNAV DA	1860-1 315 (400-1)			NA
LNAV MDA	1960-1 415 (500-1)		1960-1⅛ 415 (500-1⅛)	NA
C CIRCLING	2040-1 495 (500-1)		2200-1¾ 655 (700-1¾)	NA

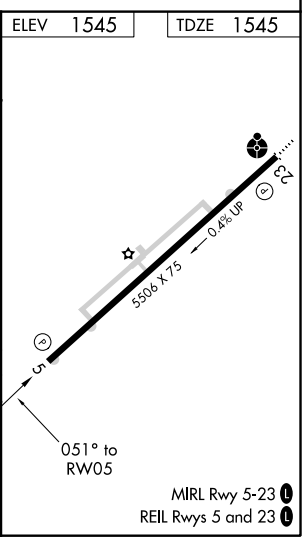

SE-1, 03 DEC 2020 to 31 DEC 2020
SE-1, 03 DEC 2020 to 31 DEC 2020