

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>45926</b><br><b>W03A</b> | APP CRS<br><b>027°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5003</b><br><b>530</b><br><b>537</b> |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 3

OHIO COUNTY (JQD)

RNP APCH.



▼

▲

Baro-VNAV and VDP NA when using Owensboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Owensboro altimeter setting and increase LPV and LNAV/VNAV DA to 851 feet. Increase all MDA 80 feet and LNAV Cat C visibility ⅔ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH:  
Climb to 2500 direct ZUTJO and hold.

|                          |  |                                 |
|--------------------------|--|---------------------------------|
| AWOS-3PT<br><b>132.1</b> | EVANSVILLE APP CON ★<br><b>124.025 290.9</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|--|---------------------------------|

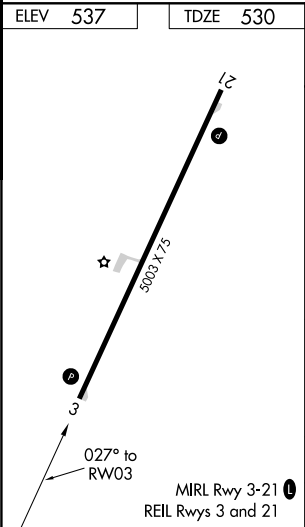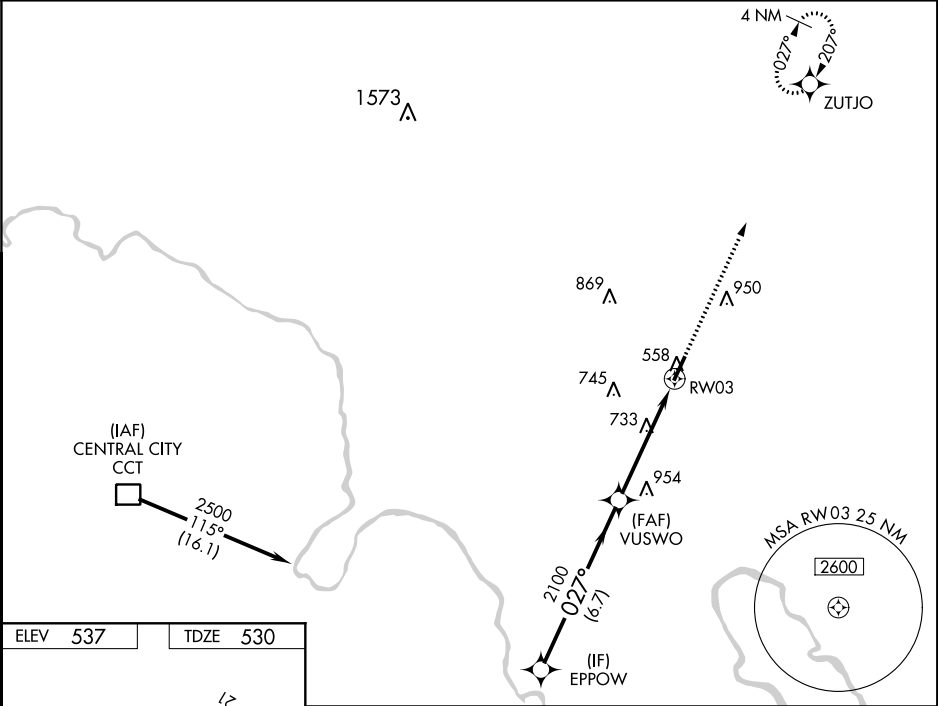

|                    |                       |        |                       |                                 |                         |
|--------------------|-----------------------|--------|-----------------------|---------------------------------|-------------------------|
| EPPOW              |                       | VUSWO  |                       | 2500                            | ZUTJO                   |
| 2500               |                       | 2100   |                       | *1.5 NM to RWY03<br>*LNAV only. |                         |
| GP 3.00°<br>TCH 40 |                       | 2100   |                       | RWY03                           |                         |
| 6.7 NM             |                       | 3.3 NM |                       | 1.5 NM                          |                         |
| CATEGORY           | A                     | B      | C                     | D                               |                         |
| LPV DA             | 780-1                 |        | 250 (300-1)           |                                 | NA                      |
| LNAV/VNAV DA       | 780-1                 |        | 250 (300-1)           |                                 | NA                      |
| LNAV MDA           | 1040-1                |        | 510 (600-1)           |                                 | 1040-1⅜<br>510 (600-1⅜) |
| Ⓢ CIRCLING         | 1040-1<br>503 (600-1) |        | 1100-1<br>563 (600-1) |                                 | 1300-2¼<br>763 (800-2¼) |

SE-1, 03 DEC 2020 to 31 DEC 2020

SE-1, 03 DEC 2020 to 31 DEC 2020