CHARLOTTE TWO DEPARTURE

AL-78 (FAA)

CHARLOTTE/DOUGLAS INTL (CLT)
CHARLOTTE, NORTH CAROLINA

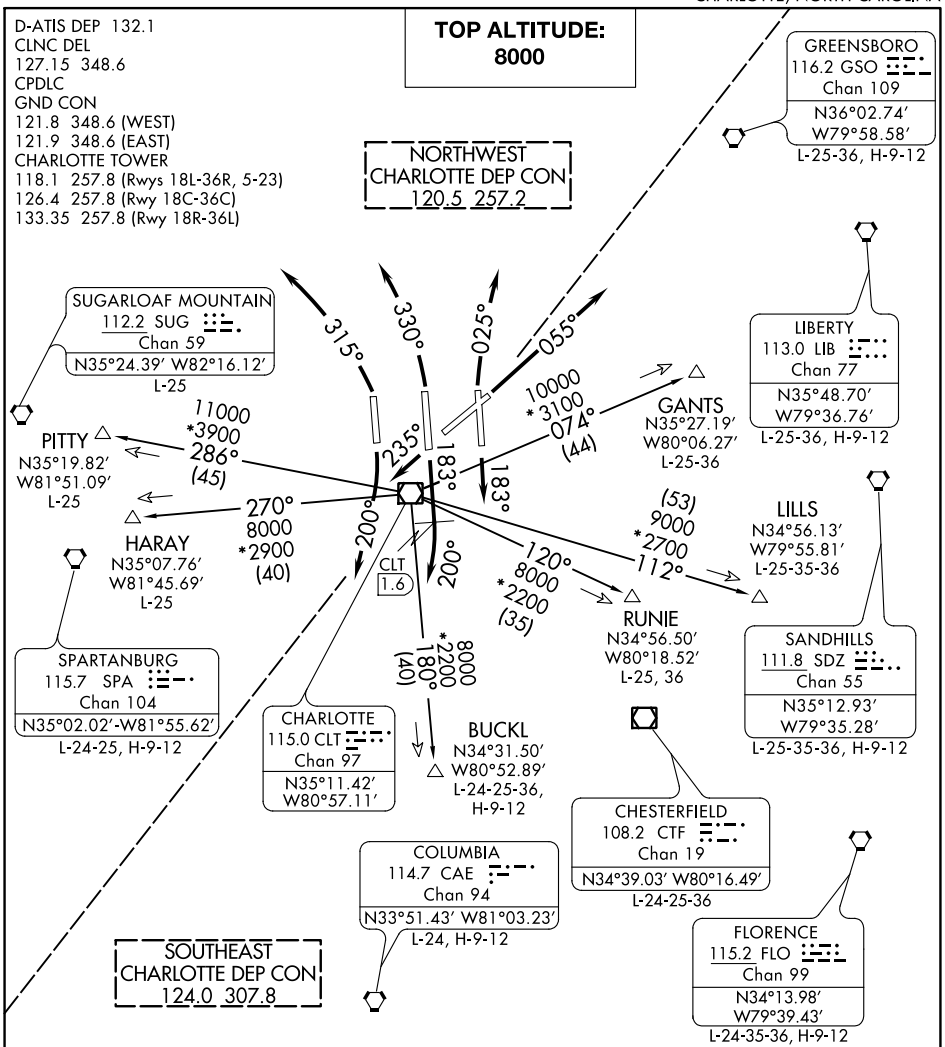

NOTE: For Turbojet aircraft requesting at or below 10000′ only.
NOTE: DME and RADAR required.
NOTE: Accelerate to 250K, if unable, advise ATC.
NOTE: Transponder code will be issued via PDC or Charlotte clearance delivery.
NOTE: If unable to accept climb rate, advise ATC on initial contact.

TAKEOFF MINIMUMS:
Rwys 18L, 18R, 18C, 23, 36C, 36R: Standard.
Rwy 5: Standard with minimum climb of 275′ per NM to 2000.
Rwy 36L: Standard with minimum climb of 231′ per NM to 3600.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-2, 03 DEC 2020 to 31 DEC 2020