

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>61310</b><br><b>W27A</b> | APP CRS<br><b>269°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>6502</b><br><b>139</b><br><b>147</b> |
|--|------------------------|-----------------------------|---|



RNAV (GPS) RWY 27  
FLORENCE RGNL (F'L.O)

Baro-VNAV NA when using Darlington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA.

When local altimeter setting not received, use Darlington altimeter setting and increase all DA/MDA 60 feet. Increase LPV and LNAV/VNAV all Cats visibility ¼ mile and LNAV Cat D ½ mile. Night Landing: Rwy 1, 19 NA.

MISSED APPROACH:  
Climb to 2000 direct  
IMOVE and hold.

|                        |   |  |                                |                                 |                         |
|------------------------|---|--|--------------------------------|---------------------------------|-------------------------|
| ATIS<br><b>123.625</b> | FLORENCE APP CON★<br><b>118.6 341.7</b> (256°-074°)<br><b>135.25 316.15</b> (075°-255°) | FLORENCE TOWER★<br><b>125.1</b> (CTAF) <b>353.85</b> | GND CON<br><b>121.9 353.85</b> | CLNC DEL<br><b>121.9 353.85</b> | UNICOM<br><b>122.95</b> |
|------------------------|---|--|--------------------------------|---------------------------------|-------------------------|

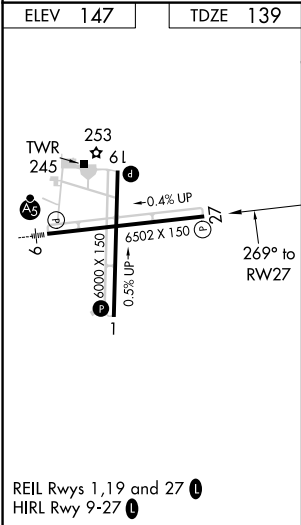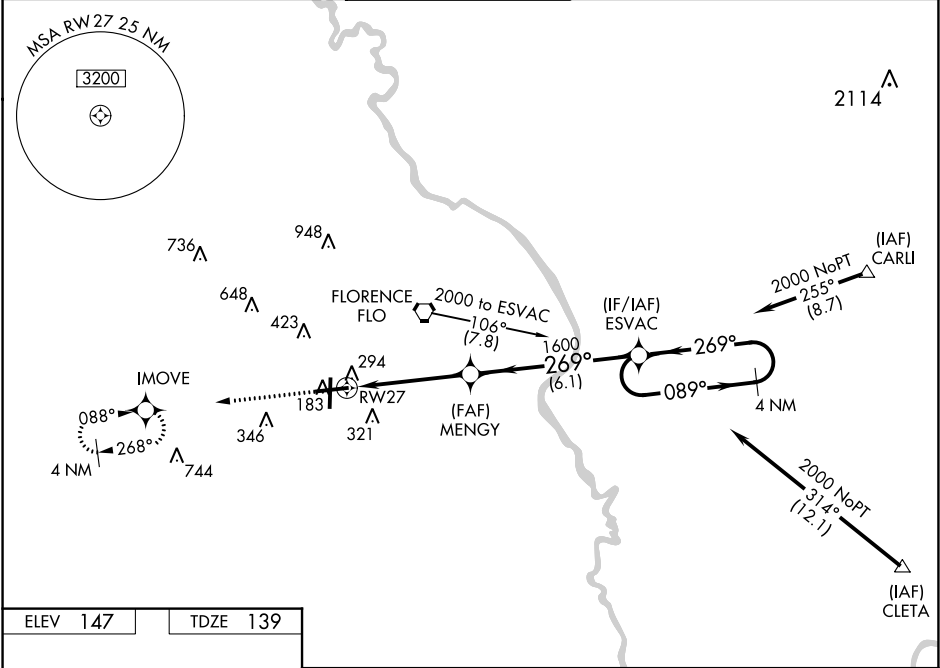

2000

IMOVE

VGSI and RNAV glidepath not coincident  
(VGSI Angle 3.00°/TCH 46).

ESVAC

4 NM Holding Pattern

GP 3.00°  
TCH 46

| CATEGORY     | A                   | B                   | C                   | D                 |
|--------------|---------------------|---------------------|---------------------|-------------------|
| LPV DA       | 474-1¼ 335 (400-1¼) |                     |                     |                   |
| LNAV/VNAV DA | 595-1¾ 456 (500-1¾) |                     |                     |                   |
| LNAV MDA     | 560-1 421 (500-1)   | 560-1¼ 421 (500-1¼) |                     |                   |
| CIRCLING     | 640-1 493 (500-1)   | 660-1 513 (600-1)   | 660-1½ 513 (600-1½) | 740-2 593 (600-2) |