RNAV (GPS) RWY 32

PIEDMONT TRIAD INTL (GSO)

WAAS	APP CRS	Rwy Idg	6380
CH 61035	323°	TDZE	902
W32A		Apt Elev	926

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Smith Reynolds altimeter setting. When local altimeter setting is not received use Smith Reynolds altimeter setting: increase all DA 38 feet and all MDA 40 feet, increase LNAV/VNAV all Cats and LNAV Cats C/D visibilities ⅛ mile, increase Circling Cats C/D visibility ¼ mile.

MISSED APPROACH: Climb to 3700 direct FAMOV and hold.

D-ATIS	GREENSBORO APP CON	GREENSBORO TOWER	GND CON	CLNC DEL
128.55	124.35 269.225 (250°-049°) 126.6 327.075 (050°-249°)	119.1 290.325	121.9 348.6	121.75

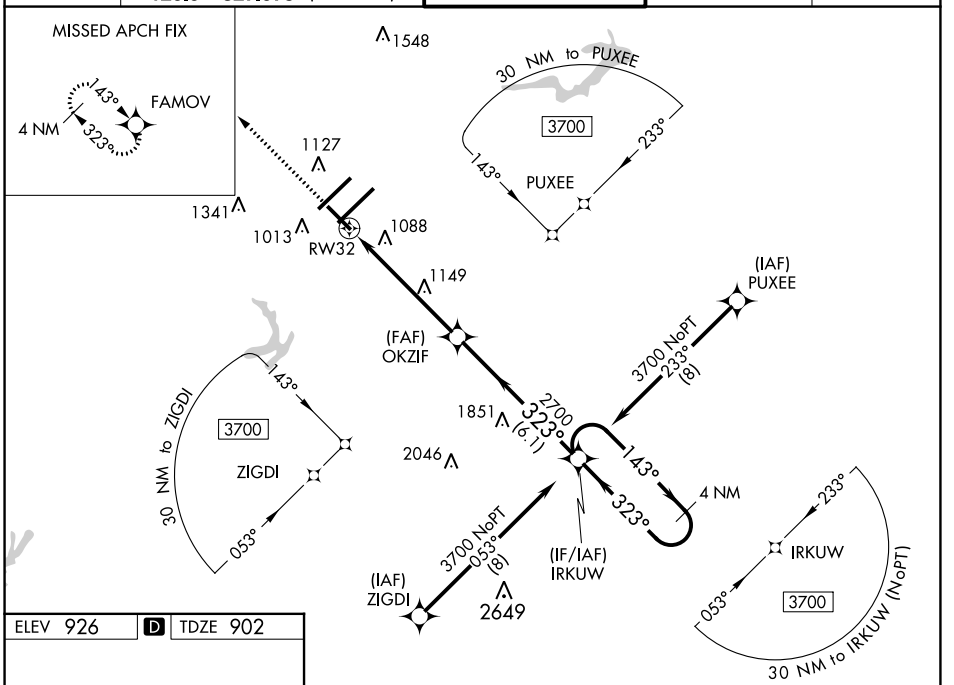

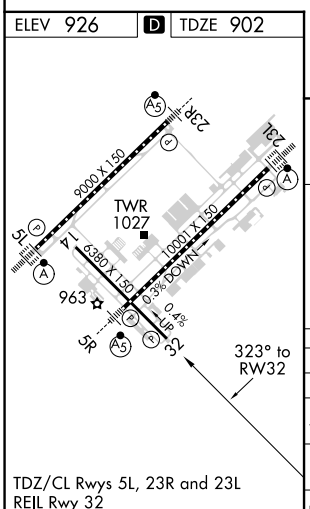

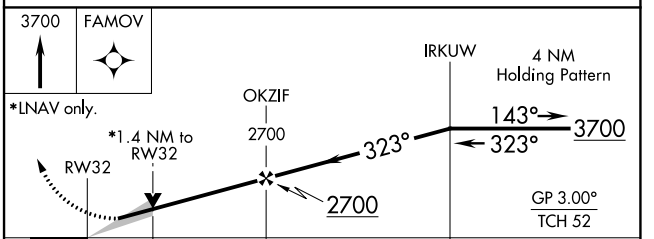

CATEGORY	A	B	C	D
LPV DA	1102-¾ 200 (200-¾)			
LNAV/VNAV DA	1419-1¾ 517 (500-1¾)			
LNAV MDA	1400-1 498 (500-1)		1400-1⅜ 498 (500-1⅜)	
C CIRCLING	1440-1 514 (600-1)		1700-2¼ 774 (800-2¼)	1700-2½ 774 (800-2½)

TDZ/CL Rwys 5L, 23R and 23L
REIL Rwy 32
HIRL Rwys 14-32, 5R-23L and 5L-23R

SE-2, 03 DEC 2020 to 31 DEC 2020
SE-2, 03 DEC 2020 to 31 DEC 2020