

LOC I-JBD	APP CRS	Rwy Idg	5342
108.95	053°	TDZE	124
		Apt Elev	125


ILS or LOC RWY 5

LUMBERTON RGNL (LBT)

ADF required. When local altimeter setting not received, use Maxton altimeter setting and increase all DA 56 feet and all MDA 60 feet; increase S-ILS 5 all Cats visibility and S-LOC 5 Cat C visibility 1/8 mile. Circling to Rwy 13 and 31 NA at night. Autopilot coupled approach NA below 1250.

MISSED APPROACH: Climb to 1000 then climbing right turn to 1900 direct JIGEL LOM and hold.

ASOS 134.775	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF) 0
-----------------	--------------------------------------	--------------------------

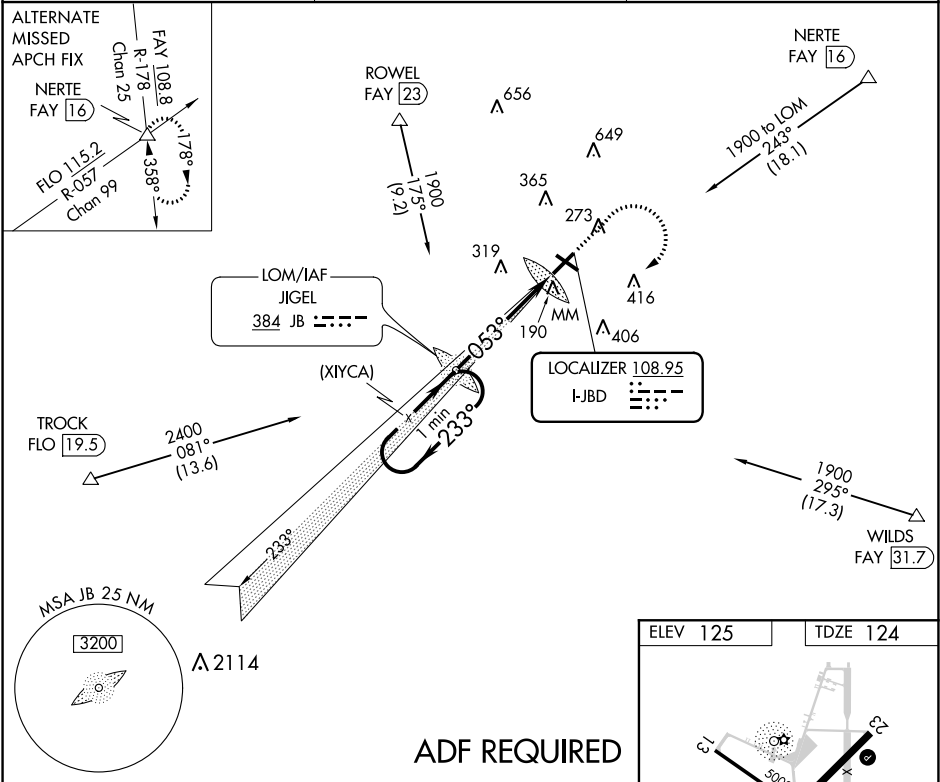

One Minute Holding Pattern		JB JIGEL LOM		1000	1900	JB
1900 ← 233°		1799		↑	↷	
GS 3.00°		053°		MM		
TCH 60		1900		↘		
		4.6 NM		0.4		
CATEGORY	A	B	C	D		
S-ILS 5		360-3/4 236 (300-3/4)		NA		
S-LOC 5	600-1	476 (500-1)	600-1 3/8 476 (500-1 3/8)	NA		
CIRCLING	660-1	535 (600-1)	660-1 1/2 535 (600-1 1/2)	NA		

