

WAAS CH 48941 W35A	APP CRS 347°	Rwy ldg TDZE Apt Elev	7001 2131 2164
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

ASHEVILLE RGNL (AVL)

RNP APCH.


⚠

Circling NA west of Rwy 17-35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.


MALSR

MISSED APPROACH: Climb to 6800 direct ONZIQ and hold, continue climb-in-hold to 6800.

ATIS 120.2	ASHEVILLE APP CON★ 124.65 269.575	ASHEVILLE TOWER★ 121.1 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

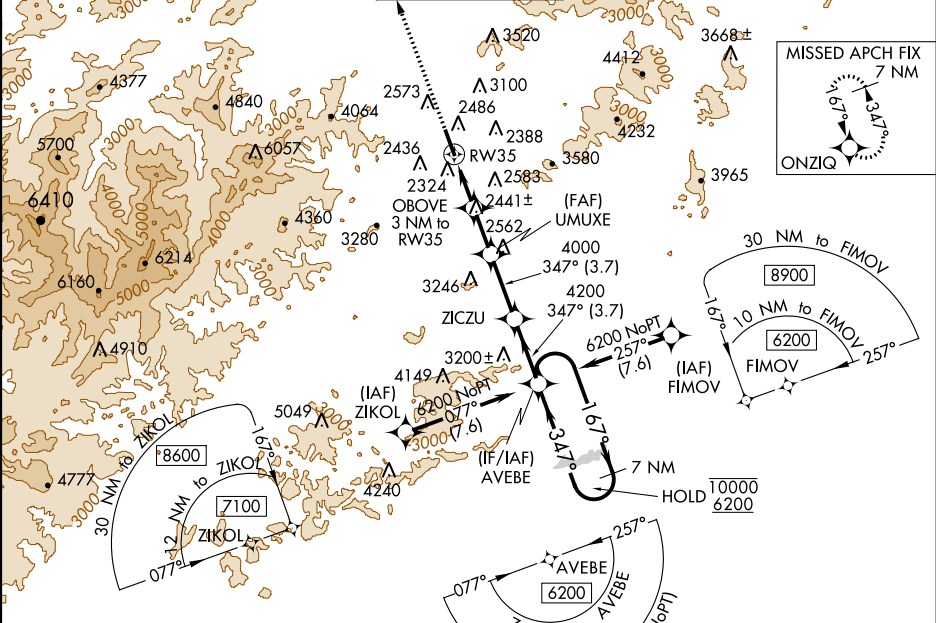

ELEV 2164	D	TDZE 2131
-----------	----------	-----------

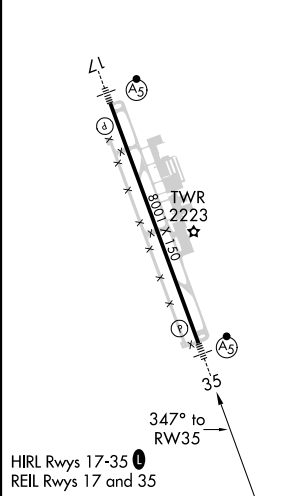

6800

ONZIQ

7 NM Holding Pattern

↑

*LNAV only.

RW35

*1.5 NM to RW35

OBOVE 3 NM to RW35

UMUXE 4000

ZICZU

AVEBE

167° →

← 347°

10000

6200

GP 3.00°

TCH 56

1.5 NM

1.5 NM

2.7 NM

3.7 NM

3.7 NM

CATEGORY

A

B

C

D

LPV DA

2334/24

203 (200-½)

LNAV/VNAV DA

2567/40

436 (500-¾)

LNAV MDA

2660/24

529 (500-½)

2660/55

529 (500-1)

CIRCLING

2800-1

636 (700-1)

2880-1

716 (800-1)

3460-3

1296 (1300-3)

3720-3

1556 (1600-3)