

WAAS CH 77701 W27A	APP CRS 274°	Rwy Idg 5000 TDZE 15 Apt Elev 19
--	------------------------	---

RNAV (GPS) RWY 27



CHARLESTON EXECUTIVE (JZI)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Charleston AFB/Intl altimeter setting and increase all Cats DA 32 feet and all MDA 40 feet; increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cats C and D visibility ½ mile. Baro-VNAV and VDP NA when using Charleston AFB/Intl altimeter setting.

MISSED APPROACH:
Climb to 2000 direct RILEY and hold.

AWOS-3 123.775	CHARLESTON APP CON 120.7 306.925	CLNC DEL 119.85	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------	---------------------------------

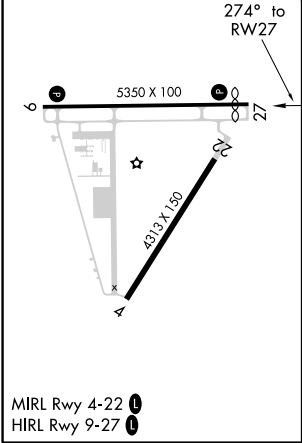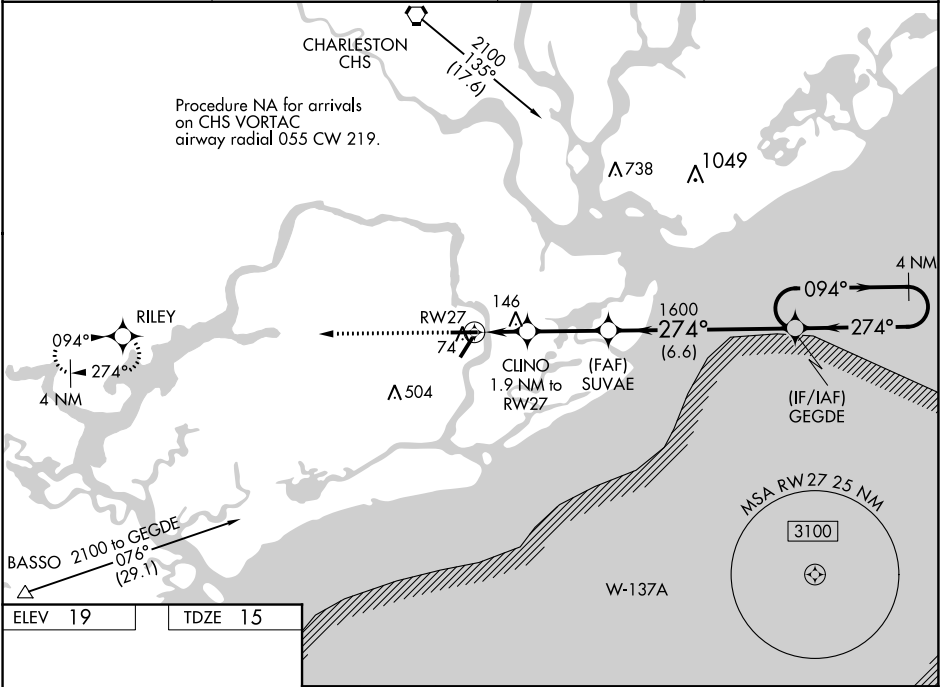

2000 ↑		RILEY ✱		CLINO 1.9 NM to RW27		SUVAE 1600		GEGDE 4 NM Holding Pattern	
*LNAV only.		*1.1 NM to RW27		*640		1600		094° → ← 274° 2100	
1.1 NM		0.8 NM		3 NM		6.6 NM		GP 3.00° TCH 42	
CATEGORY		A		B		C		D	
LPV DA		265-7/8 250 (300-7/8)							
LNAV/ VNAV DA		303-1 288 (300-1)							
LNAV MDA		400-1		385 (400-1)		400-1 1/8		385 (400-1 1/8)	
CIRCLING		440-1 421 (500-1)		480-1 461 (500-1)		480-1 1/2 461 (500-1 1/2)		580-2 561 (600-2)	