ASOS
120.775
CLNC DEL
126.85
UNICOM (CTAF)
123.05
CHARLOTTE DEP CON
120.05 307.8

TOP ALTITUDE: 3000

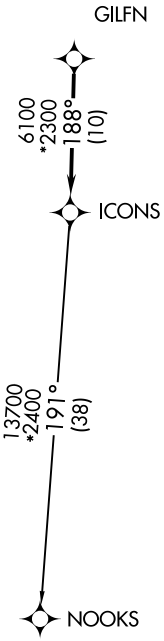

TAKEOFF MINIMUMS
Rwys 2, 20: Standard.

NOTE: For turbojets only.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.
NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

Climb on heading assigned by ATC, expect RADAR vectors to GILFN, then on track 188° to ICONS. Then on NOOKS transition. Maintain 3000, expect filed altitude within 10 minutes after departure.

NOOKS TRANSITION (ICONS4.NOOKS)

SE-2, 03 DEC 2020 to 31 DEC 2020
SE-2, 03 DEC 2020 to 31 DEC 2020