WAAS CH **99624** **W05A** | APP CRS **047°** | Rwy Idg **5500** TDZE **132** Apt Elev **133**

RNAV (GPS) RWY 5

WAYNE EXECUTIVE JETPORT (GWW)

Baro-VNAV NA when using Smithfield altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. VDP NA with Smithfield altimeter setting. When local altimeter setting not received, use Smithfield altimeter setting and increase LPV DA to 490 feet, LNAV/VNAV DA to 462 feet, and all MDA 60 feet; increase LPV all Cats visibility to 1⅛ and LNAV/VNAV all Cats visibility to 1 mile.

MISSED APPROACH: Climb to 2000 direct JONVA and hold.

AWOS-3P	SEYMOUR JOHNSON APP CON *	UNICOM
118.975	**123.7 290.9**	**122.7** (CTAF) L

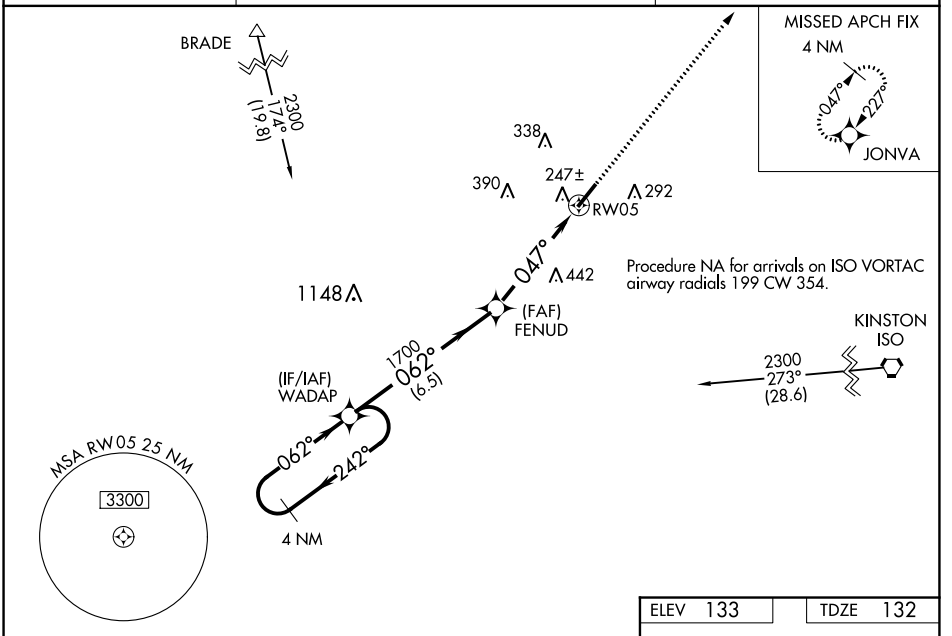

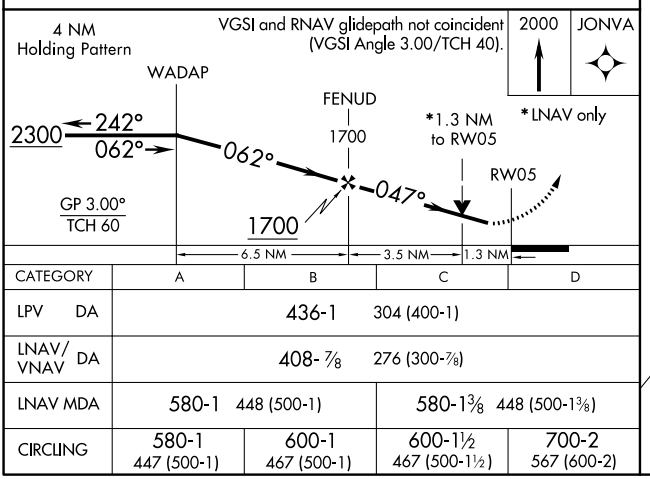

CATEGORY	A	B	C	D
LPV DA	436-1	304 (400-1)		
LNAV/VNAV DA	408-⅞	276 (300-⅞)		
LNAV MDA	580-1 448 (500-1)		580-1⅜ 448 (500-1⅜)	
CIRCLING	580-1 447 (500-1)	600-1 467 (500-1)	600-1½ 467 (500-1½)	700-2 567 (600-2)

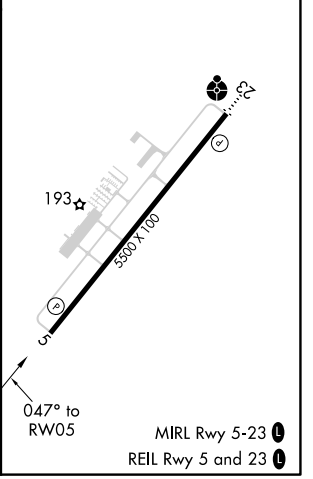

SE-2, 03 DEC 2020 to 31 DEC 2020
SE-2, 03 DEC 2020 to 31 DEC 2020