RNAV (GPS) RWY 9R

MELBOURNE INTL (MLB)

WAAS	APP CRS	Rwy Idg	10181
CH 60901	094°	TDZE	32
W09B		Apt Elev	33

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MALSR

MISSED APPROACH: Climb to 2000 direct ZUVOM and hold.

ATIS	ORLANDO APP CON	MELBOURNE TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
132.55	132.65 281.425	118.2 (CTAF) L 257.8	121.9	121.9	132.65 (When twr closed)	122.95

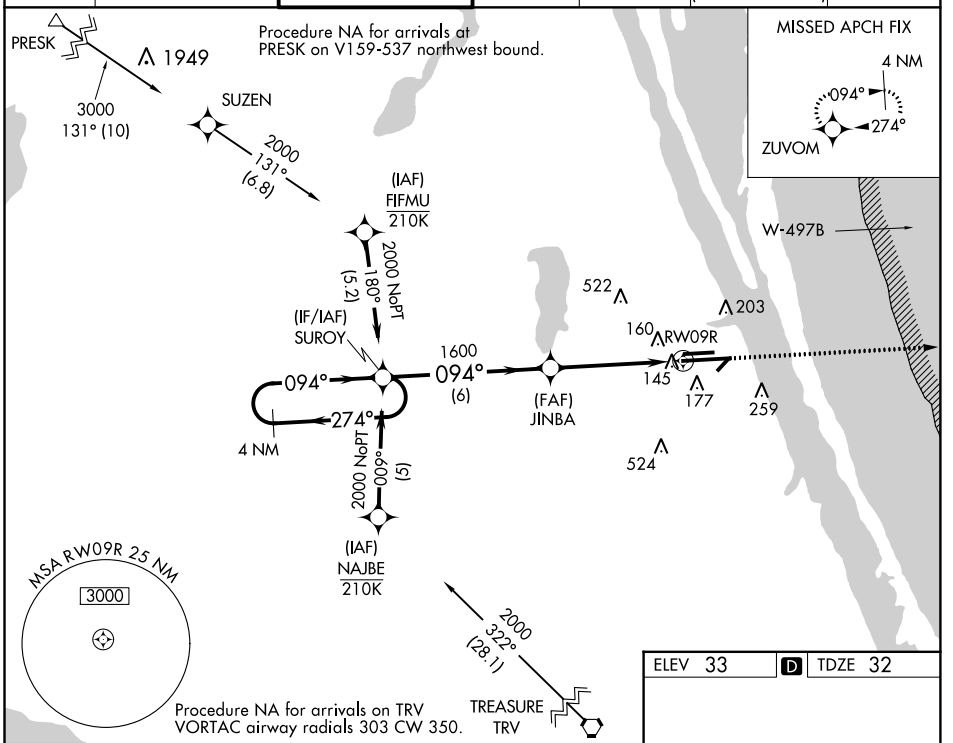

ELEV 33 D TDZE 32

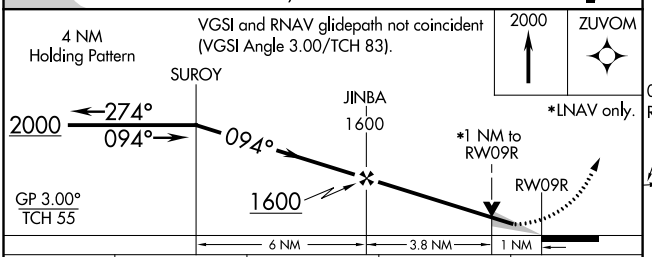



CATEGORY	A	B	C	D
LPV DA	232/18 200 (200-½)			
LNAV/VNAV DA	427/40 395 (400-¾)			
LNAV MDA	420/24 388 (400-½)		420/35 388 (400-⅝)	
C CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)

REIL Rwy 27L L
HIRL Rwy 9R-27L L
MIRL Rwys 5-23 and 9L-27R L
TDZ/CL Rwy 9R

SE-3, 03 DEC 2020 to 31 DEC 2020
SE-3, 03 DEC 2020 to 31 DEC 2020