

LOC/DME I-PLJ	APP CRS	Rwy Idg	8002
111.35	273°	TDZE	8
Chan 50 (Y)		Apt Elev	8

ILS or LOC RWY 27R

MIAMI-OPA LOCKA EXECUTIVE (OPF')

▼

▲


DME Required. When local altimeter setting not received, use Miami Intl altimeter setting and increase all DA/MDA 20 feet. For inop MALS, increase S-ILS 27R all Cats visibility to ¾ mile and S-LOC Cats C/D visibility to 1 ½ mile. Helicopter visibility reduction below ¾ SM NA. Autopilot coupled approach NA below 700 feet.

MALS

=

MISSED APPROACH: Climb to 2000 heading 273° and DHP VORTAC R-335 to BRBRA/DHP 11.5 DME and hold.

ATIS	MIAMI APP CON	OPA LOCKA TOWER ★	GND CON	CLNC DEL
125.9	128.6 306.975	134.675 (CTAF) 0	120.025	119.2

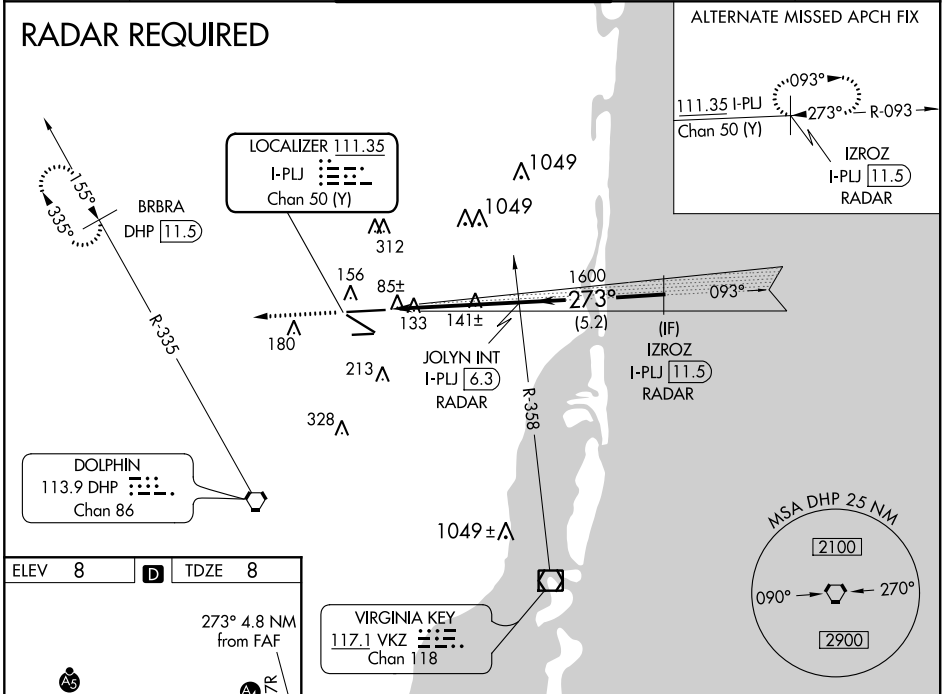

MIRL Rwy 9R-27L
HIRL Rwys 9L-27R and 12-30

FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36