RNAV (GPS) Z RWY 26L

MIAMI INTL (MIA)

WAAS	APP CRS	Rwy Idg	10220
CH 81905	272°	TDZE	8
W26B		Apt Elev	9

Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C (43°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSF, increase LNAV/VNAV Cat D visibility to RVR 6000 and LNAV Cat D visibility to 1⅝ mile.

MALSF

MISSED APPROACH: Climb to 2000 direct LAWNN and on track 345° to BRBRA and hold.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	CLNC DEL	CPDLC
ARR 119.15	124.85 322.3	118.3 256.9	121.8 (8L/8R/12/26L/26R) 348.6	135.35	
DEP 133.675			127.5 (9/27/30)		

MISSED APCH FIX

4 NM 156° 336° BRBRA

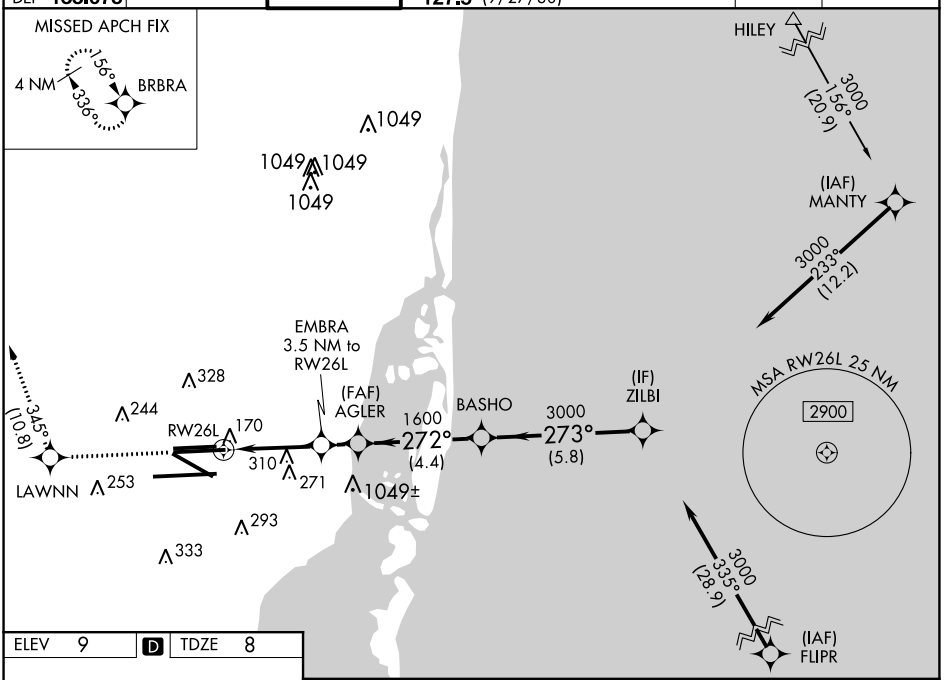

ELEV 9 D TDZE 8



TDZ/CL Rwy 8R
REIL Rwys 8L and 26R
HIRL all Rwys

2000 LAWNN tr 345° BRBRA

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 73).

*LNAV only.

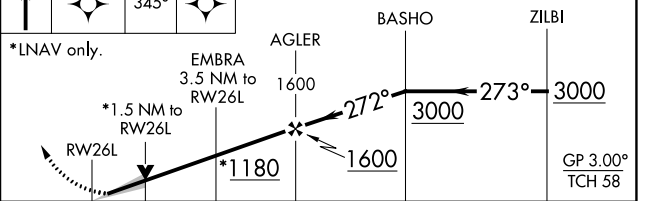

CATEGORY	A	B	C	D
LPV DA	208/40	200 (200-¾)		
LNAV/VNAV DA	348/45	340 (400-⅞)		
LNAV MDA	560/40	552 (600-¾)	560-1⅜	552 (600-1⅜)

SE-3, 03 DEC 2020 to 31 DEC 2020
SE-3, 03 DEC 2020 to 31 DEC 2020