TOP ALTITUDE: 5000

D-ATIS 133.675
CLNC DEL 135.35
CPDLC
GND CON
121.8 348.6(8L/8R/12/26L/26R)
127.5 348.6(9/27/30)
MIAMI TOWER
118.3 256.9
MIAMI DEP CON
119.45 290.325

TAKEOFF MINIMUMS

Rwy 8L: 300-1¼ or Standard with minimum obstacle climb of 382′ per NM to 300, minimum ATC climb of 500′ per NM to 520.
Rwys 8R, 9: Standard with minimum ATC climb of 500′ per NM to 520.
Rwy 12: Standard with minimum obstacle climb of 229′ per NM to 1200, minimum ATC climb of 500′ per NM to 520.
Rwys 26L/R, 27, 30: Standard with minimum ATC climb of 300′ per NM to 520.

NOTE: Turbojet aircraft accelerate to 250K, if unable, advise ATC.
NOTE: Turboprop aircraft maintain maximum forward airspeed and climb rate.
NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: For non-GPS equipped aircraft, FLL VOR/DME must be operational for takeoff Rwys 26R, 26L, 27, 30.

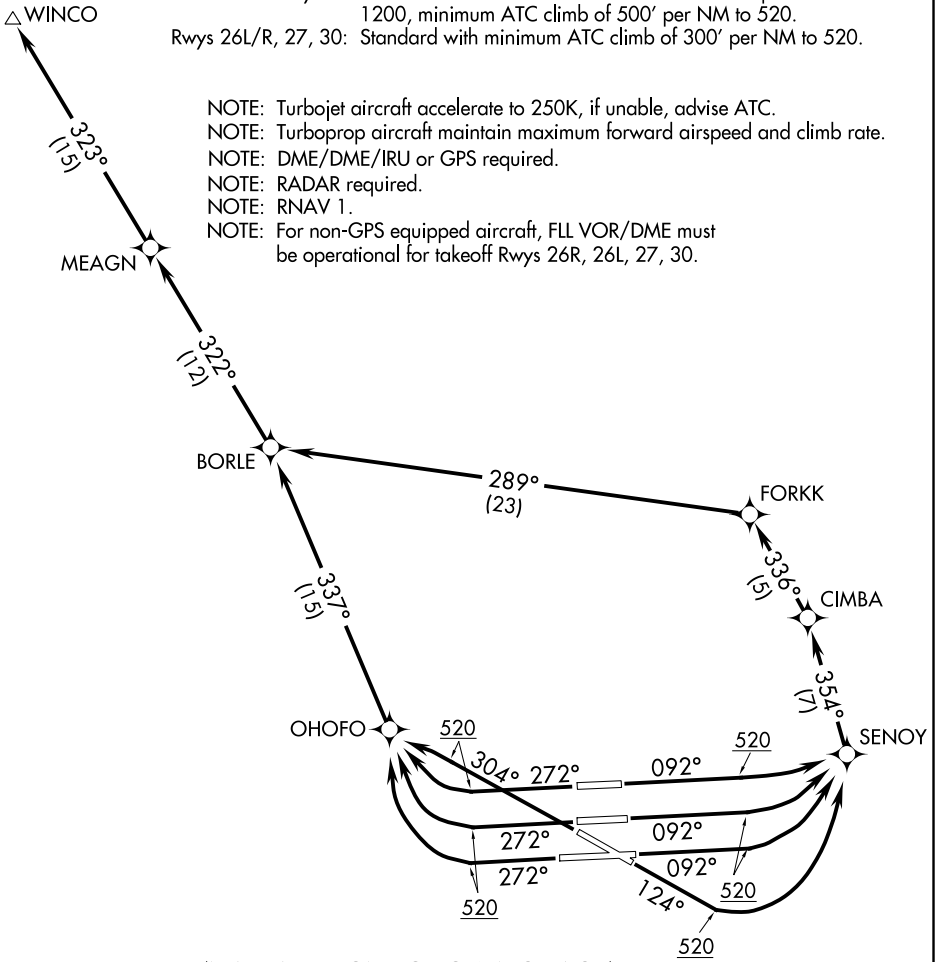

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-3, 03 DEC 2020 to 31 DEC 2020
SE-3, 03 DEC 2020 to 31 DEC 2020