TOP ALTITUDE: 6000

D-ATIS DEP 128.475
CLNC DEL 133.6
CPDLC
GND CON 121.7 269.4
TAMPA TOWER 119.5 269.4
TAMPA DEP CON 118.8 239.3

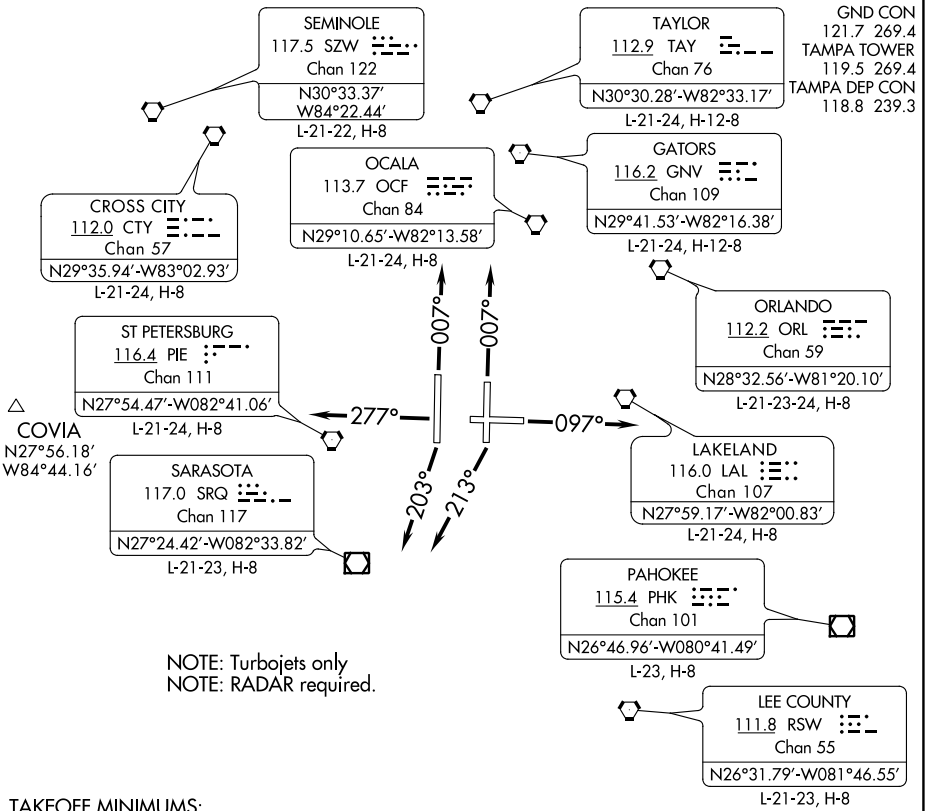

NOTE: Turbojets only
NOTE: RADAR required.

TAKEOFF MINIMUMS:
Rwys 1L/R, 19R, 28: Standard.
Rwy 10: Standard with minimum climb of 245′ per NM to 900.
Rwy 19L: 200-1½ or standard with minimum climb of 220′ per NM to 300, or alternatively, with standard takeoff minimums and a normal 200′ per NM climb gradient, takeoff must occur no later than 1500′ prior to departure end of runway.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climb heading 007°, thence. . . .
TAKEOFF RUNWAY 10: Climb heading 097°, thence. . . .
TAKEOFF RUNWAY 19L: Climb heading 213°, thence. . . .
TAKEOFF RUNWAY 19R: Climb heading 203°, thence. . . .
TAKEOFF RUNWAY 28: Climb heading 277°, thence. . . .

. . . .expect RADAR vectors to join filed/assigned route. Maintain 6000. Expect clearance to filed altitude/flight level within 10 minutes after departure.

SE-3, 03 DEC 2020 to 31 DEC 2020