RNAV (GPS) RWY 1R

TAMPA INTL (TPA)

WAAS CH 87105 W01B	APP CRS 007°	Rwy Idg 8300 TDZE 20 Apt Elev 26

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 1L. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 2000 direct COBOX and hold.

ARR	D-ATIS	DEP	TAMPA APP CON	TAMPA TOWER	GND CON	CLNC DEL	CPDLC
126.45		128.475	118.5 307.175	119.5 269.4	121.7 269.4	133.6	

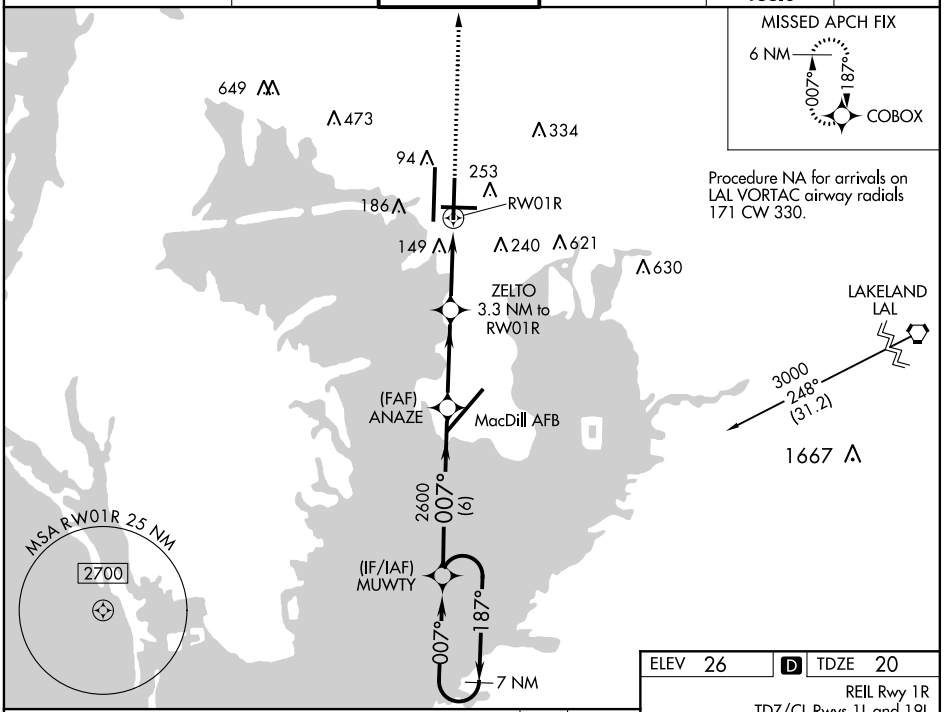

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

2000 COBOX

*LNAV only.

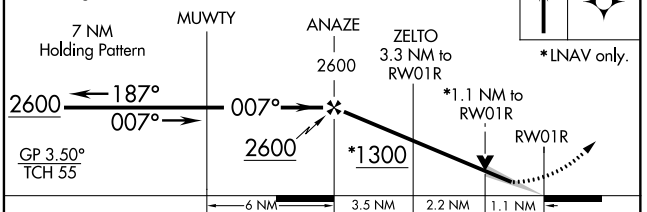

CATEGORY	A	B	C	D	E
LPV DA	290-⅞ 270 (300-⅞)			NA	
LNAV/VNAV DA	491-1⅜ 471 (500-1⅜)			NA	
LNAV MDA	440-1 420 (500-1)		440-1¼ 420 (500-1¼)		
C CIRCLING	560-1 534 (600-1)		680-1¾ 654 (700-1¾)	980-3 954 (1000-3)	

ELEV 26 D TDZE 20

REIL Rwy 1R
TDZ/CL Rwys 1L and 19L
HIRL Rwys 1L-19R, 1R-19L, and 10-28

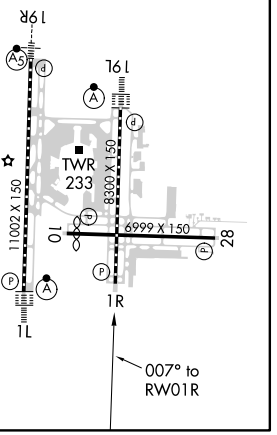

SE-3, 03 DEC 2020 to 31 DEC 2020
SE-3, 03 DEC 2020 to 31 DEC 2020