
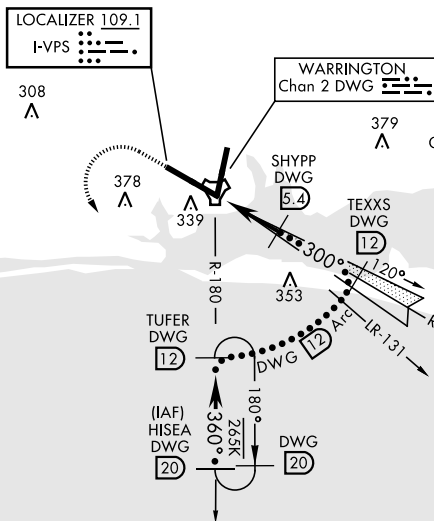



## HI-ILS or LOC RWY 30

ATIS ★	EGLN APP CON		EGLN TOWER	GND CON	CLNC DEL
134.625 273.5	125.1 281.45	271°- 089°	118.2 353.65	121.8 335.8	127.7 377.2
	132.1 360.6	090°- 270°			

† Missed approach requires use of RNAV or ATC RADAR monitoring.




CAUTION: Coupled approaches not authorized inside decision height.



## DME or RADAR REQUIRED

(For LOC approach)

EMERG SAFE ALT 100 NM 3600

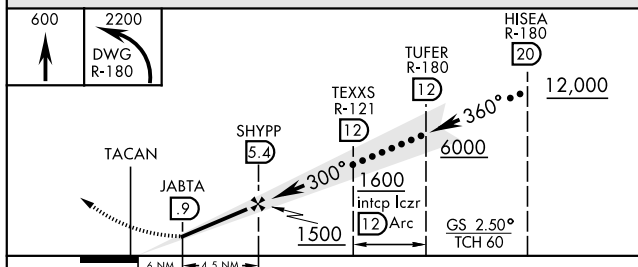

CATEGORY	C	D	E
S-ILS 30*	249/24	200 (200-½)	
S-LOC 30**	440/35	391 (400-⅝)	
CIRCLING	760-2 676 (700-2)	760-2 ¼ 676 (700-2 ¼)	760-2 ½ 676 (700-2 ½)

LOC FAF to MAP 4.5 NM					
Knots	120	140	160	180	200
Min:Sec	2:15	1:56	1:41	1:30	1:21

EGLIN AFB/DESTIN-FT WALTON BEACH(KVPS)

## HI-ILS or LOC RWY 30