

| | | |
|--|------------------------|--|
| WAAS CH 61039 W18A | APP CRS 176° | Rwy Idg 9180 TDZE 7 Apt Elev 11 |
|--|------------------------|--|

RNAV (GPS) RWY 18






For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C (38°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALS, increase LNAV/VNAV all Cats visibility to RVR 4000 and LNAV visibility Cats C/D to RVR 4500.


MALSR



MISSED APPROACH:
Climb to 2600 direct
RONXI and hold.

| | | | | | |
|---------------|-------------------------------|---|------------------------|-------------------------|------------------|
| ATIS 134.5 | TAMPA APP CON 125.3 316.05 | ST. PETERSBURG TOWER★ 118.3 (CTAF) 0 257.8 | GND CON 121.9 348.6 | CLNC DEL 120.6 350.2 | UNICOM 122.95 |
|---------------|-------------------------------|---|------------------------|-------------------------|------------------|

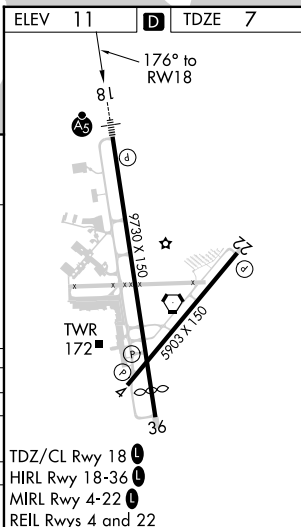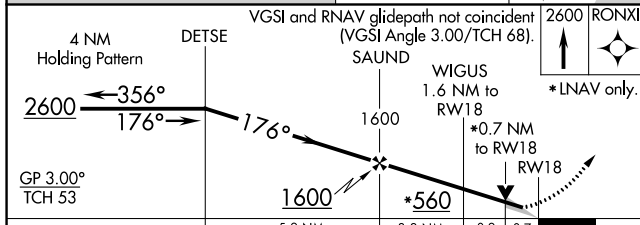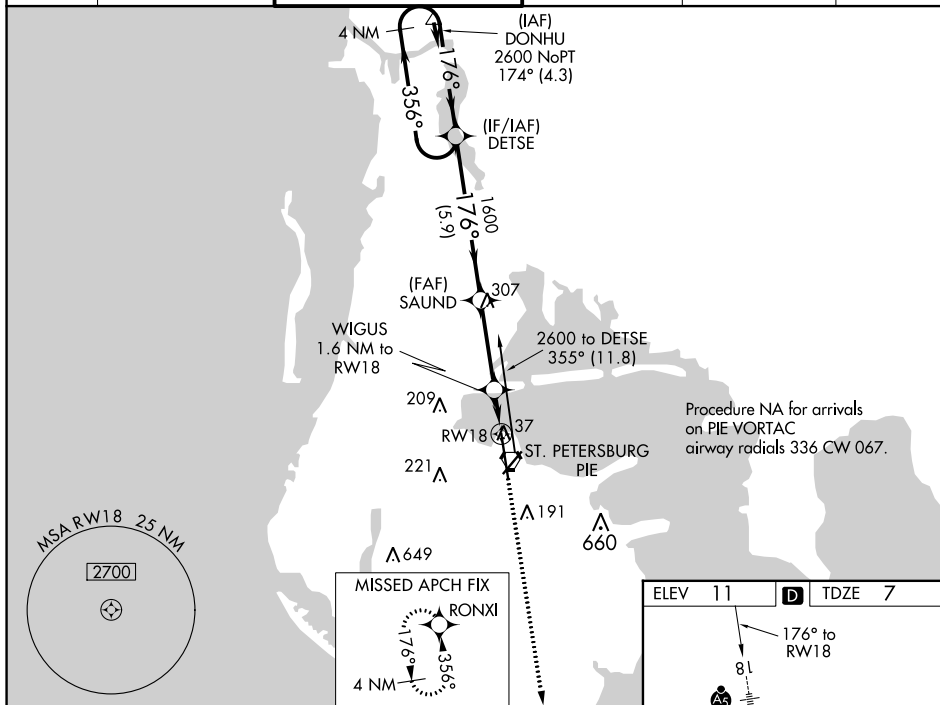

| CATEGORY | | A | | B | | C | | D | |
|--|-----|-------|-------------|---|--|----------------------|--|---|--|
| LPV | DA | | | 207/18 | | 200 (200-½) | | | |
| RNAV/ VNAV | DA | | | 257/24 | | 250 (300-½) | | | |
| RNAV | MDA | | | 300/24 | | 293 (300-½) | | | |
|  CIRCLING | | 520-1 | 509 (600-1) | 640-1 ³ / ₄ 629 (700-1 ³ / ₄) | | 680-2 669 (700-2) | | | |