
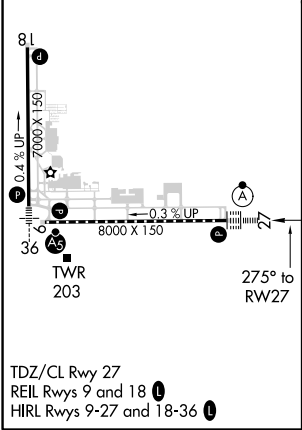


WAAS CH 97302 W27A	APP CRS 275°	Rwy Idg TDZE 58 Apt Elev 83
--	------------------------	---

RNAV (GPS) RWY 27
Tallahassee Intl (TLH)

RNP APCH. ▼ ▲ ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.		ALSF-2 ▲	MISSED APPROACH: Climb to 3000 direct RAGKO and hold.		
ATIS 119.45 239.25	Tallahassee APP CON ★ 135.8 317.4	Tallahassee Tower ★ 118.7 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 126.65 275.8	UNICOM 123.075

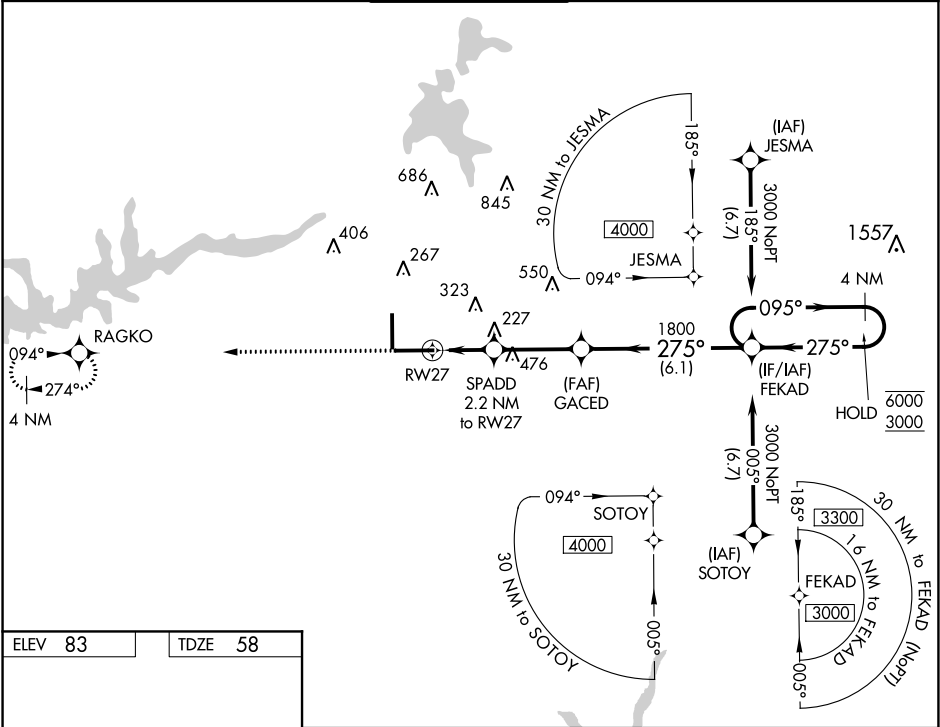

<div>3000 ↑ RAGKO</div> <div>*LNAV only.</div>		<div>SPADD 2.2 NM to RW27</div>		<div>GACED 1800</div>	<div>FEKAD 4 NM Holding Pattern</div>
<div>*1.2 NM to RW27</div>		<div>*800</div>	<div>275°</div>	<div>095° → 6000 ← 275° 3000</div>	<div>GP 3.00° TCH 59</div>
<div>1.2 NM</div>		<div>1 NM</div>	<div>3.1 NM</div>	<div>6.1 NM</div>	
CATEGORY	A		B	C	D
LPV DA	258/18		200 (200-½)		
LNAV/ VNAV DA	375/30		317 (300-⅝)		
LNAV MDA	480/24	422 (400-½)		480/40	422 (400-¾)
<div>CIRCLING</div>	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-1½)	800-2¼ 717 (800-2¼)	