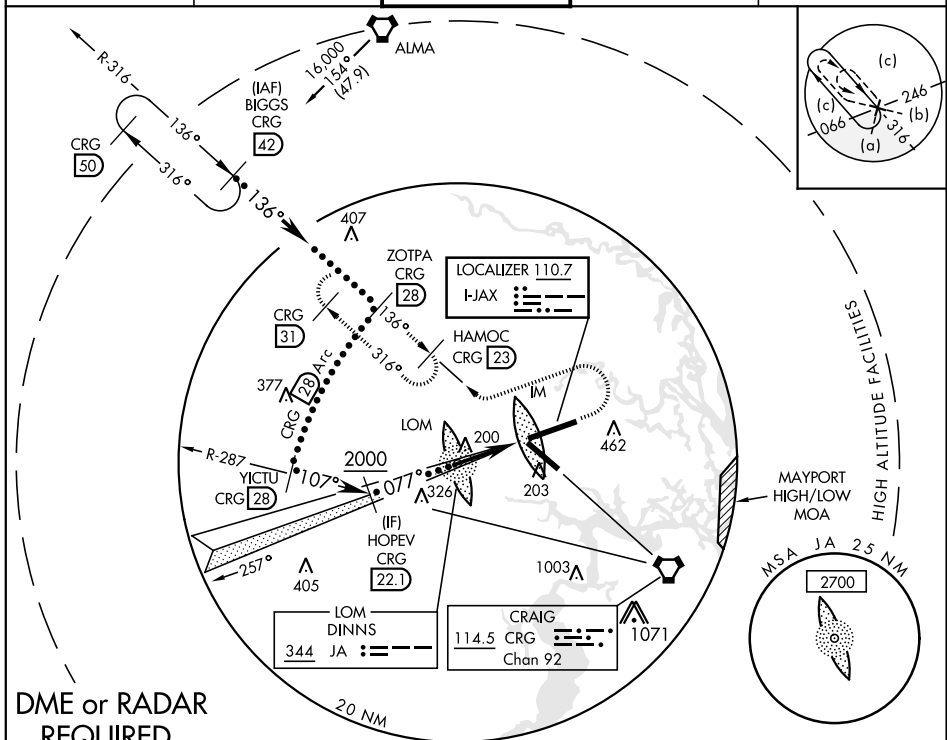



HI-ILS or LOC RWY 8

LOC I-JAX 110.7	APCH CRS 077°	Rwy ldg 10,000 THRE 29 Arprt Elev 29	JAL-5570 [USAF]	JACKSONVILLE INTL (KJAX)
* When ALS inop, increase RVR to 40, vis to $\frac{3}{4}$ mile. ** When ALS inop, increase vis to $1\frac{1}{2}$ miles.			ALSF-2	MISSED APPROACH: Climb to 1000 then climbing left turn to 4000 on heading 250° and CRG R-316 to HAMOC/CRG 23 DME and hold, continue climb-in-hold to 4000.
ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275

DME or RADAR
REQUIRED

EMERG SAFE ALT 100 NM 2800

BIGGS R-316 42	ZOTPA R-316 28	YICTU R-287 28	HOPEV R-287 22.1	1000	4000	HAMOC CRG 23
16,000	4000	2000	2000	1900	1891	1900
GS 3.00° TCH 51	136°	107°	077°	077°	077°	077°
VGSi and ILS glidepath not coincident.						
5.5 NM						
CATEGORY	C	D	E			
S-ILS 8 *	229/18	200	(200- $\frac{1}{2}$)			
S-LOC 8 **	480/45	451	(500- $\frac{7}{8}$)			
CIRCLING	520-1 $\frac{1}{2}$ 491 (500-1 $\frac{1}{2}$)	640-2 611 (700-2)	760-2 $\frac{1}{2}$ 731 (800-2 $\frac{1}{2}$)			

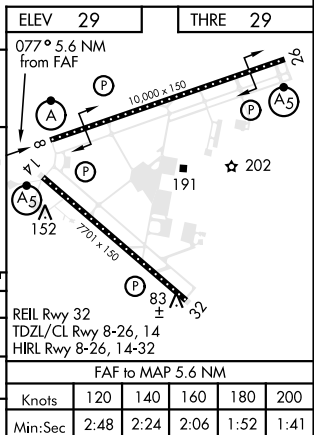

HI-ILS or LOC RWY 8