

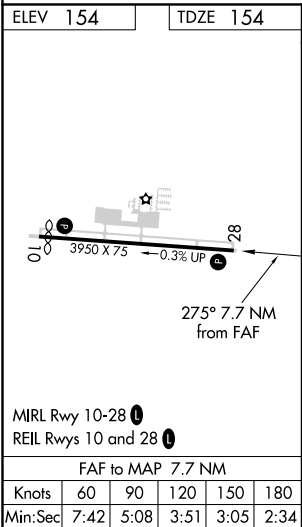
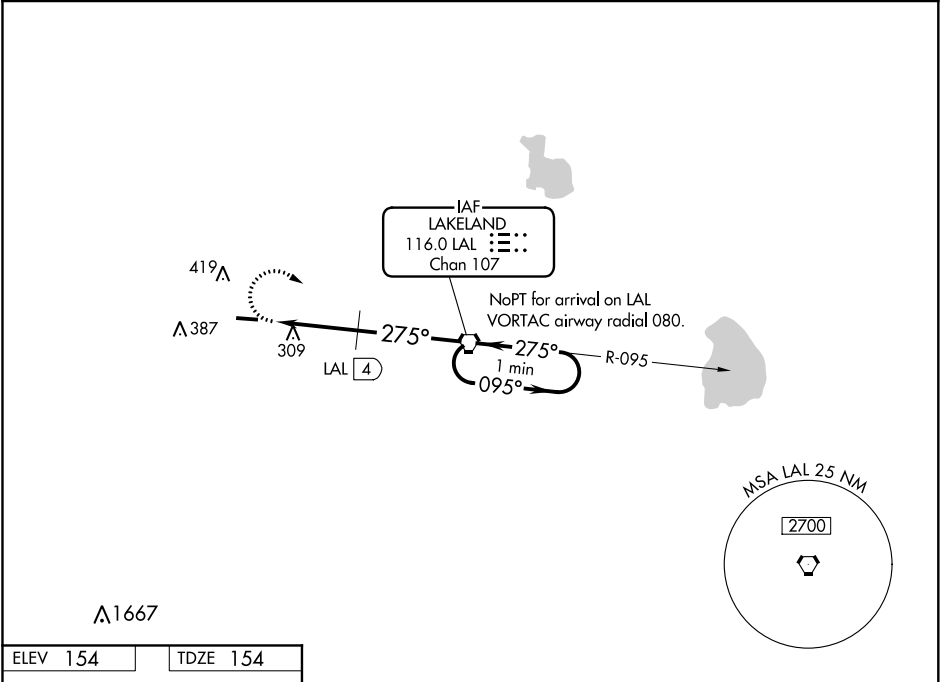
⚠



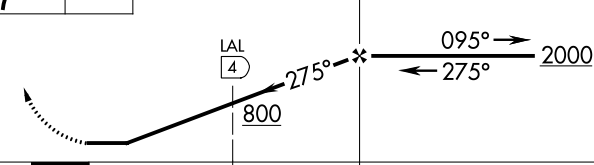


NA

When local altimeter setting not received, use Lakeland altimeter setting and increase all MDA 20 feet. Straight-in and Circling Rwy 28 NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing right turn to 2000 direct LAL VORTAC and hold.

AWOS-3 120.025	TAMPA APP CON 120.65 290.3	CLNC DEL 121.725 (GCO)	UNICOM 123.05 (CTAF) 0
-------------------	-------------------------------	---------------------------	----------------------------------



2000	LAL	One Minute Holding Pattern			
					
CATEGORY	A	B	C	D	
S-28	800-1	646 (700-1)	NA		
 CIRCLING	800-1	646 (700-1)	NA		
DME MINIMUMS					
S-28	600-1	446 (500-1)	NA		
 CIRCLING	700-1 546 (600-1)	800-1 646 (700-1)	NA		