ILS Z or LOC Z RWY 30

NORTHWEST ALABAMA RGNL (MSL)

LOC I-MSL	APP CRS		
109.7	297°	Rwy Idg	6694
		TDZE	551
		Apt Elev	551

DME required. RADAR requried for procedure entry.

When local altimeter setting not received, use Decatur altimeter setting: Increase DA to 833 feet and all MDA 100 feet; Increase S-LOC 30 Cat C, D visibility ⅜ SM and Circling Cat C, D visibility ½ SM. DME from MSL VORTAC. Simultaneous reception of I-MSL and MSL DME required. For inop ALS increase S-LOC 30 Cats C/D visibility to 1 SM. For inop ALS when using Decatur altimeter setting, increase S-ILS 30 all Cats visibility to ⅞ SM, and increase S-LOC 30 Cats C/D to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 3000 on MSL VORTAC R-292 to JOBTA/MSL VORTAC 19 DME and hold.

ASOS	MEMPHIS CENTER	GCO	UNICOM
119.425	120.8 307.0	121.725	123.05 (CTAF) L

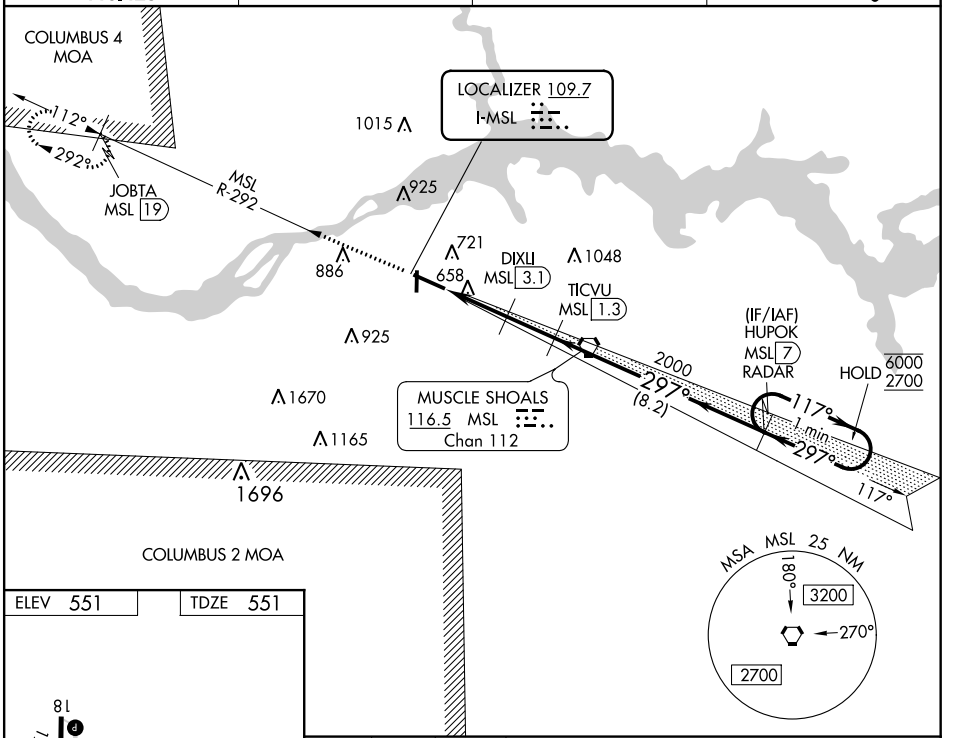



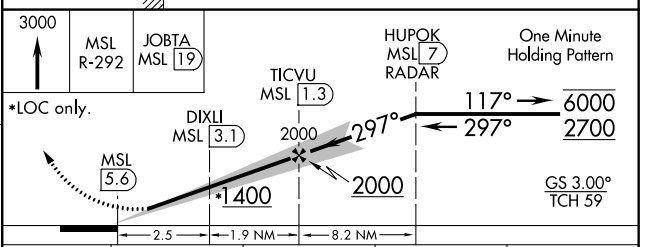

CATEGORY	A	B	C	D
S-ILS 30	751-½	200 (200-½)		
S-LOC 30	920-½	369 (400-½)	920-⅝	369 (400-⅝)
C CIRCLING	1040-1	489 (500-1)	1280-2	1280-2¼
			729 (800-2)	729 (800-2¼)

REIL Rwy 12 L
MIRL Rwy 18-36 L
HIRL Rwy 12-30 L

SE-4, 03 DEC 2020 to 31 DEC 2020
SE-4, 03 DEC 2020 to 31 DEC 2020