

LOC/DME I-SEM	APP CRS	Rwy Idg	8014
110.5	329°	TDZE	165
Chan 42		Apt Elev	166



ILS Z or LOC Z RWY 33  
CRAIG FIELD (SEM)

**⚠** For inoperative MALS, increase S-LOC 33 Cat D visibility to 1½ mile and increase ZEMUM fix minimums S-LOC 33 Cats C and D visibility to 1½ mile. VDP NA with Montgomery altimeter setting. When local altimeter setting not received, use Montgomery altimeter setting and increase DA 78 feet, all MDA 80 feet, increase S-LOC 33 Cats C and D visibility ½ mile, Circling Cat C visibility ½ mile and Circling Cat D visibility ¼ mile, increase ZEMUM fix minimums S-LOC 33 Cats C and D visibility ½ mile and Circling Cat C visibility ½ mile and Circling Cat D visibility ¼ mile. For inoperative MALS, when using Montgomery altimeter setting, increase S-ILS 33 all Cats visibility to ½ mile, S-LOC 33 Cats C and D visibility to 1¼ mile and increase ZEMUM fix minimums Cats C and D visibility to 1½ mile. ADF required.

**MALS**  
A1

**MISSED APPROACH:** Climb to 1000 then climbing left turn to 3100 direct POLLK LOM/I-SEM 6.2 DME/RADAR and hold, continue climb-in-hold to 3100.

AWOS-3PT 119.15	MONTGOMERY APP CON ★ 124.0 363.025	UNICOM 122.7 (CTAF) 0
--------------------	---------------------------------------	--------------------------

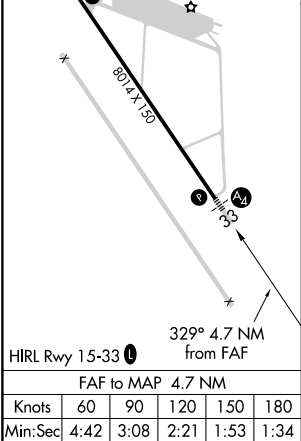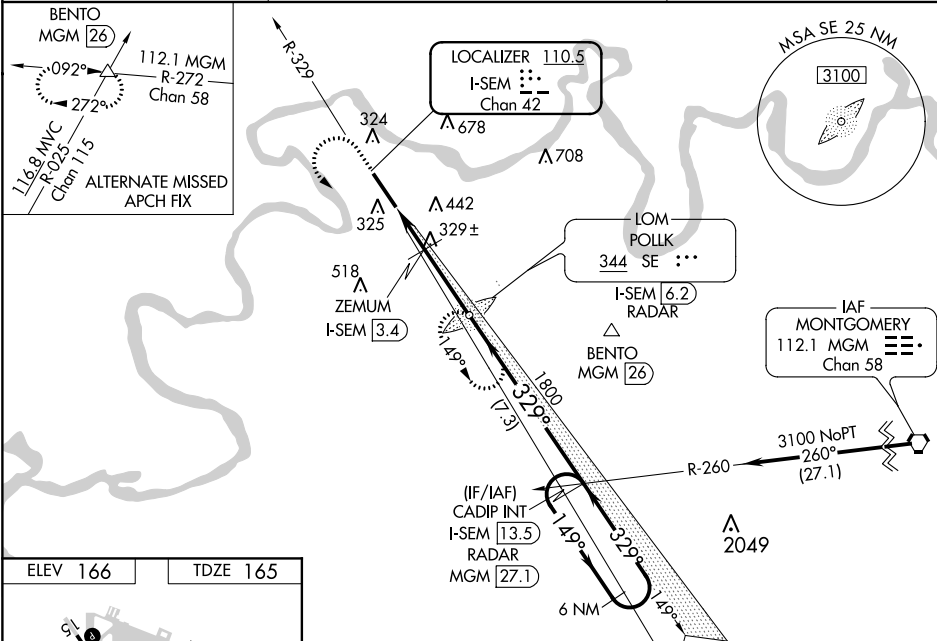

1000	3100	POLLK LOM I-SEM [6.2]	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 56).	CADIP INT I-SEM [13.5] RADAR	6 NM Holding Pattern
* LOC only.	I-SEM [1.5]	ZEMUM I-SEM [3.4]	POLLK LOM I-SEM [6.2] RADAR	I-SEM [13.5] RADAR	6 NM
	1.1 NM	0.8	2.8 NM	7.3 NM	
* 800 when using Montgomery altimeter setting.					
CATEGORY	A	B	C	D	
S-ILS 33	365-¾		200 (200-¾)		
S-LOC 33	720-¾		720-1½		555 (600-1½)
CIRCLING	720-1	760-1	760-1½	1040-2¾	
	554 (600-1)	594 (600-1)	594 (600-1½)	874 (900-2¾)	
ZEMUM FIX MINIMUMS					
S-LOC 33	580-¾		580-1		415 (500-1)
CIRCLING	660-1	760-1	760-1½	1040-2¾	
	494 (500-1)	594 (600-1)	594 (600-1½)	874 (900-2¾)	

SE-4, 03 DEC 2020 to 31 DEC 2020

SE-4, 03 DEC 2020 to 31 DEC 2020