

WAAS CH 58206 W18B	APP CRS 185°	Rwy Idg 12600 TDZE 629 Apt Elev 629
--	------------------------	--

RNAV (GPS) RWY 18R

HUNTSVILLE INTL-CARL T JONES FIELD (HSV)



RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10 °C or above 54°C.
▲ Circling NA for Cats C/D/E east of Rwy 18L-36R. For inop ALS, increase LPV Cat E visibility ASR to RVR 4000, LNAV/VNAV Cat E visibility to 1½ SM, and LNAV Cat C/D/E visibility to 1½ SM.

ALSF-2

MISSED APPROACH:
Climb to 3000 direct BOSAC and hold.

ATIS 121.25	HUNTSVILLE APP CON ★ 125.6 354.1	HUNTSVILLE TOWER ★ 127.6 (CTAF) 350.35	GND CON 121.9 269.525	CLNC DEL 120.35	UNICOM 122.95
-----------------------	--	--	---------------------------------	---------------------------	-------------------------

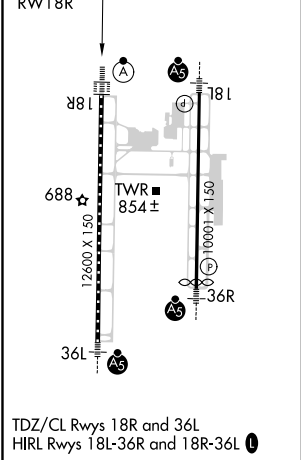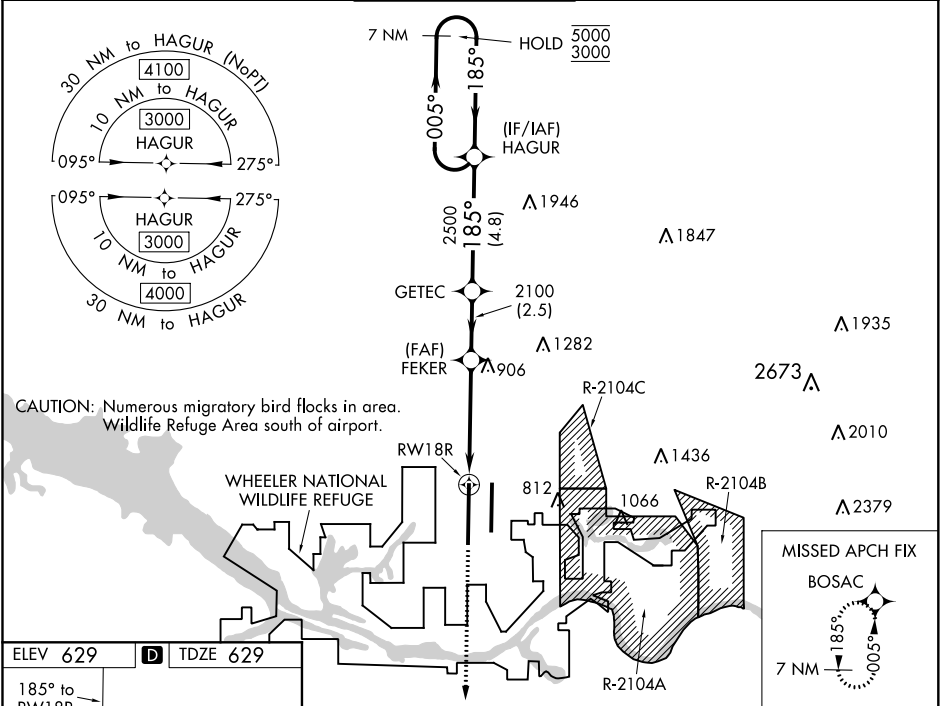

3000 BOSAC		7 NM Holding Pattern	
*LNAV only.		HAGUR	
*1.6 NM to RW18R		GETEC	
RW18R		FEKER	
1.6 NM		2100	
2.9 NM		2500	
2.5 NM		185°	
4.8 NM		005°	
CATEGORY		A	
LPV DA		829/18 200 (200-½)	
LNAV/VNAV DA		1071/45 442 (500-¾)	
LNAV MDA		1200-24 571 (600-½)	
CIRCLING		1200-1 571 (600-1)	
		1200-1½ 571 (600-1½)	
		1240-2 611 (700-2)	
		1260-2¼ 631 (700-2¼)	